

Avatto Έξυπνη Πρίζα WiFi N-WOT10-EU-B ΤΥΥΑ (Μαύρο)

AVATTO · EAN 6976037360551

Machine translation from Polski. In case of doubt the manufacturer's original document prevails.

Touch Light Switch WiFi / Smart Socket WiFi wall-mounted ed

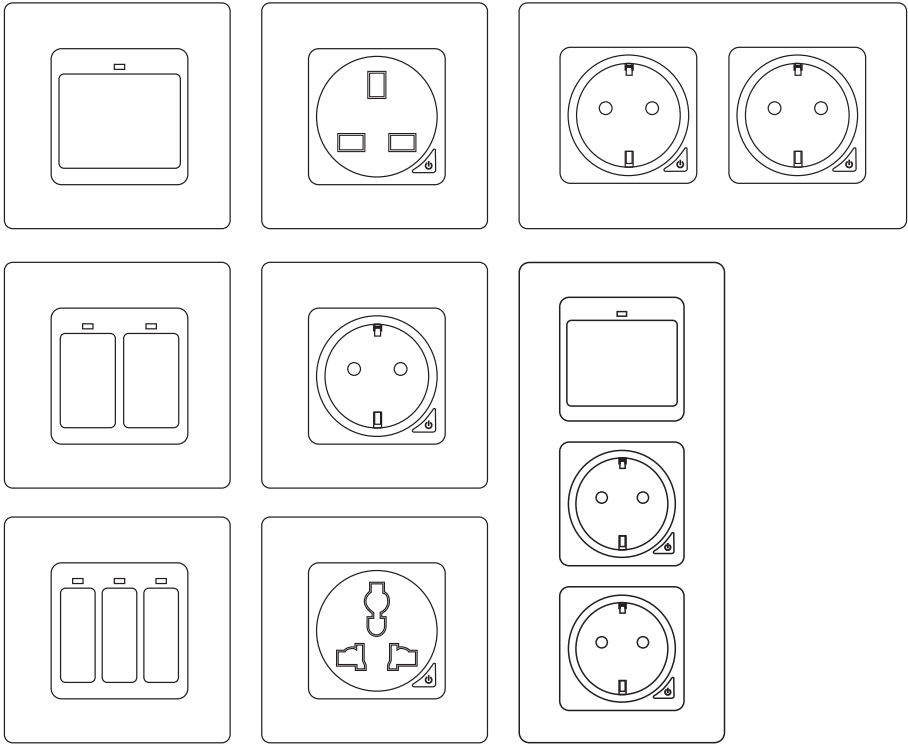

User Manual

1. Touch Light Switch WiFi

Operating Voltage: AC 110-240V (50/60Hz)

Normal Load Power: $\leq 800W$


Maximum Peak Current: 10A

Maximum Peak Power: 1100W


Wireless Protocol: WiFi 2.4GHz

Wireless Standard: IEEE802.11 b/g/n


1.1 Installation Instructions

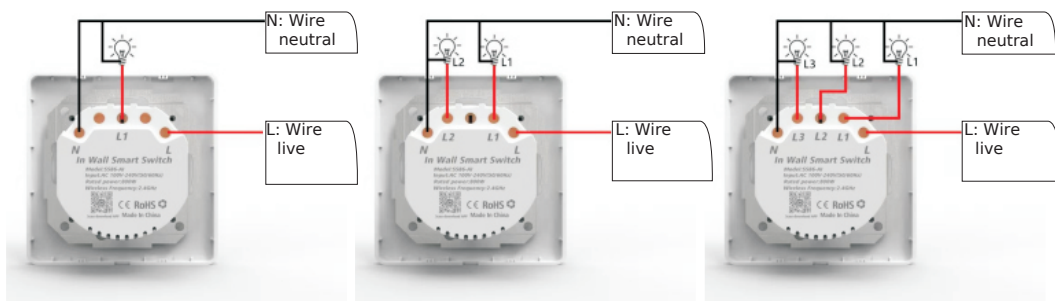


Single
Double
Triple

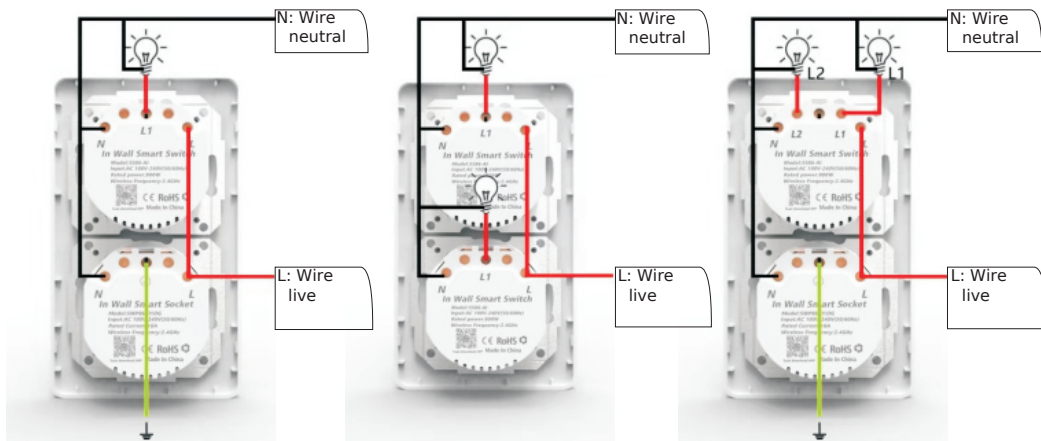


1.1.1 Installation Method




We have specially prepared accessories for you to modify the head, so you can better install the switch in the wall.




1.1.2 Touch Switch Installation



1. Insert the screwdriver and turn it 90 degrees to open the front frame.



2. Insert the screwdriver to lift the panel.



3. After connecting the wires, tighten 4 screws and install the panel and the front frame (no. 2 and 3 in the picture).

1.1.3 Alternative Method for Touch Switch Installation



1. Tighten 4 screws to secure the back cover (no. 1 in the picture).
2. Install the switch frame (no. 2 in the picture).
3. Insert the panel frame into the switch frame (no. 3 in the picture).
4. Insert the switch panel into the frame (no. 4 in the picture).

1.2 Reset Recovery State Instructions:

1. Press and hold the button for 20 seconds.
2. The indicator light will flash quickly or slowly.

2. WiFi Smart Wall Socket

Operating Voltage: AC 110-240V (50/60Hz)

Normal Load Power: $\leq 3000W$


Output: 16A(Max)

Maximum Peak Power: 3600W

Wireless Protocol: WiFi 2.4GHz

Wireless Standard: IEEE802.11 b/g/n

2.1 Installation Instructions

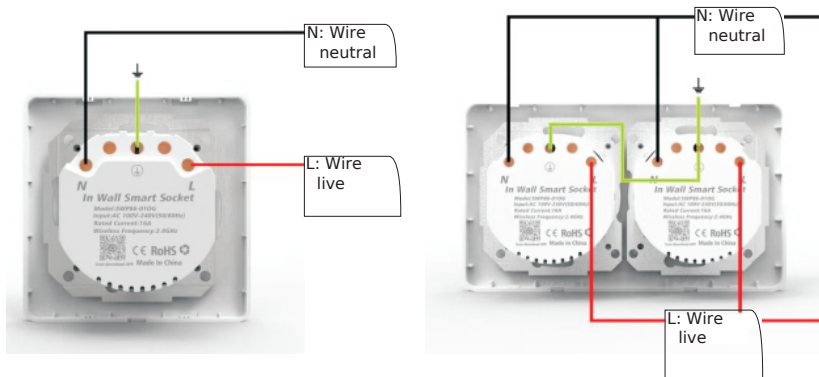

2.1.1 Installation Method



2.1.2 Touch Switch Installation Method and Retrofit Installation Method
See 1.1.2 and 1.1.3 above.

2.2 Reset Recovery State Instructions:

1. Press and hold the button for 5 seconds.
2. The indicator light will flash quickly or slowly.

3. Download and Install the App



Using your phone, scan the QR code below or search for "Smart Life" in the Apple Store or Google Play to download the app.



Enter your account name and password to log in.

If you do not have an account, please register first. The system will automatically identify your country. You can use your mobile phone number or email address as the account name.

Press "Next" to receive a verification code via SMS to your mobile phone. Enter the desired password. Press "Confirm" to complete the registration.

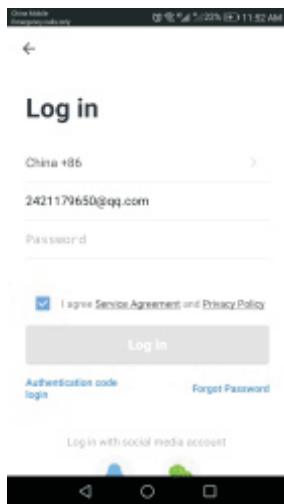
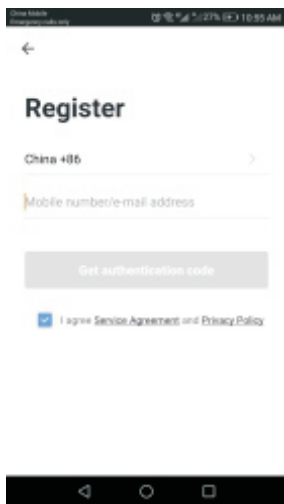


4.1 Add New WiFi Device

- 1- First, connect your phone to the local WiFi.
- 2- Press and hold the switch button for 20 seconds until the lights flash to reset the settings.
- 3- In the Smart Life app, press "+" on the home page and select "Wall Switch".
- 4- Enter the WiFi password and confirm.
- 5- Wait for successful configuration.



4.2 Add New Zigbee Device

1. Make sure the device is in rapid flashing mode.
2. Open the Tuya Zigbee smart gateway.
3. In the Zigbee smart gateway, click to add a sub-device.
4. Find the device and add it.

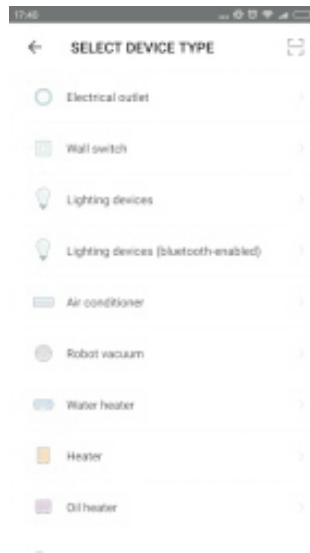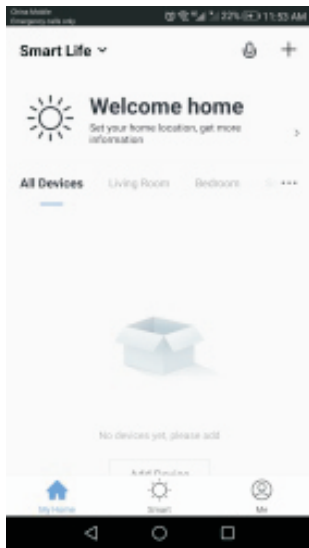



5. App Operation

After successful configuration, you can control the WiFi switch/socket in the app.
You can open/close the switch/socket.

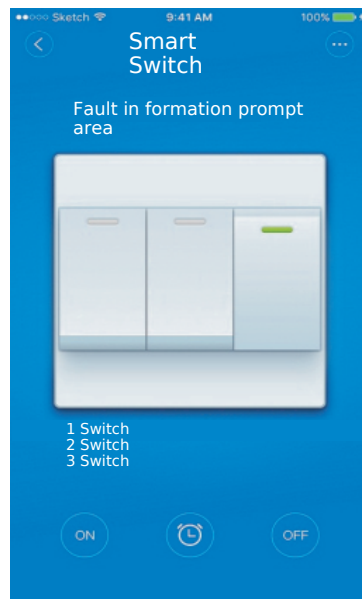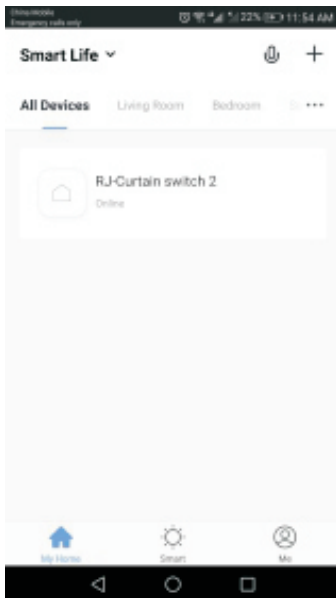

6. Set Timer

You can set a schedule for opening/closing the switch/socket.

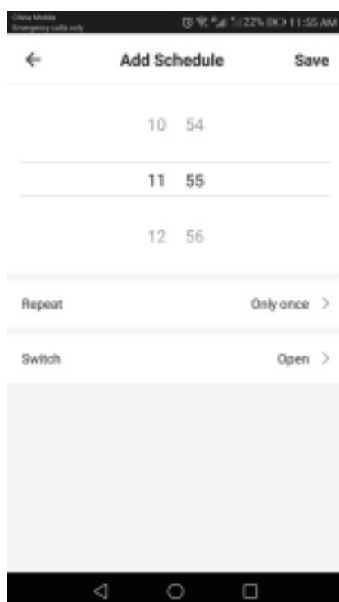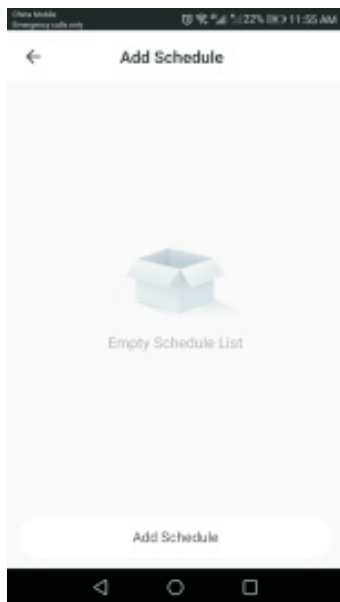

7. Share Device



- 1- Select "Device Sharing" in the profile.
- 2- Press "Add".
- 3- Enter the mobile phone number/email of the person you want to share the device with.
- 4- The device will be automatically saved to your shared account.


8. Manually Reset Switch

Repeat step 5 to reset the device.


9. How to Control the Device with Amazon Alexa

Open the "Amazon Alexa" app. Go to "Home" and select "Skills". Enter "Smart Life" in the search bar. Press "Enable" to add the skill. Enter your "Smart Life" APP account name and password. Then press "Link Now" to continue. After successful connection, close the window and return to the Alexa app.

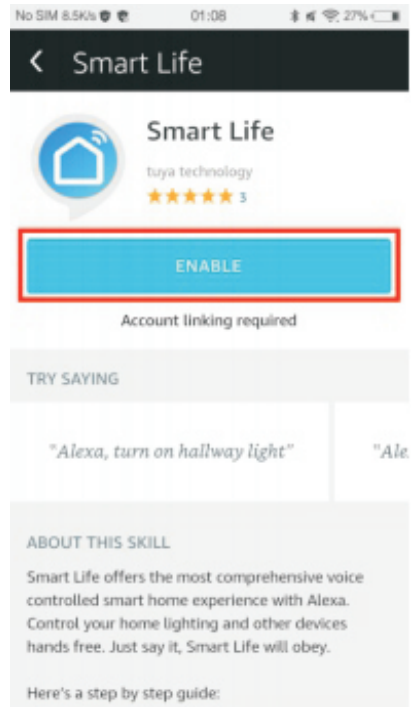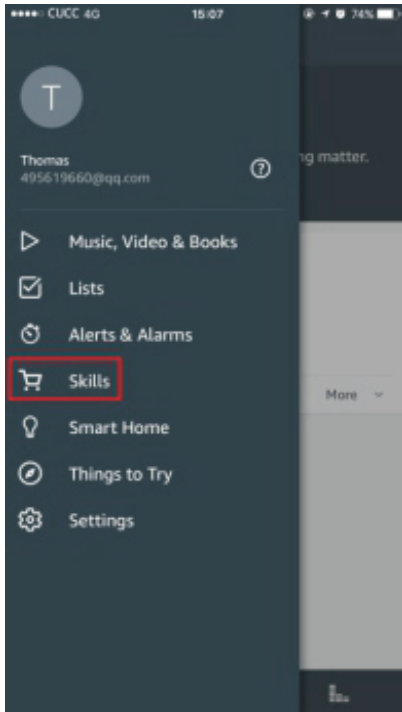

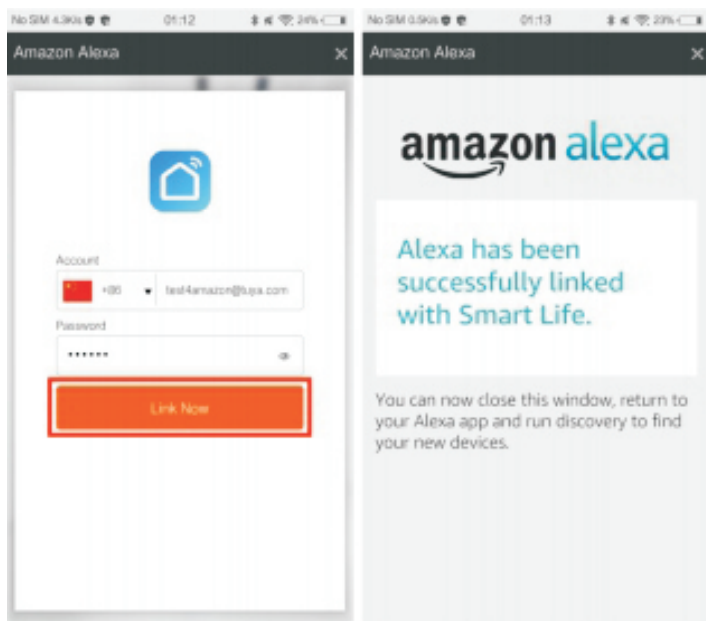

Press "Smart Home", select "Devices", and then press "Discover". Alexa will discover the devices. After about 20 seconds, the devices will appear on the list.

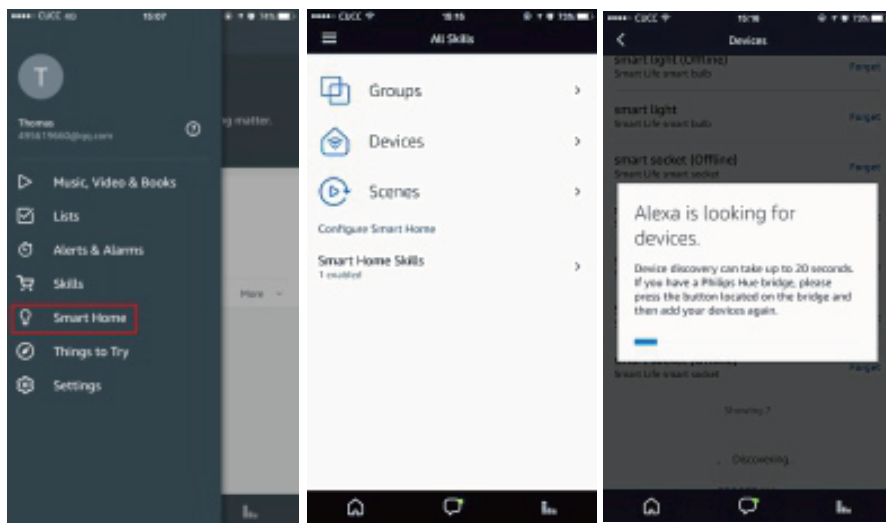


Now you can use your Alexa for voice control of Smart devices. "Alexa, turn on/off the switch/socket in the bedroom."

10. How to Control the Device with Google Home


Open the "Google Home" or "Google Assistant" app. Go to "Home" and select "Home Control".

Press "+" in the bottom right corner to add the skill. You can find "Smart Life" on the "Add Devices" list.

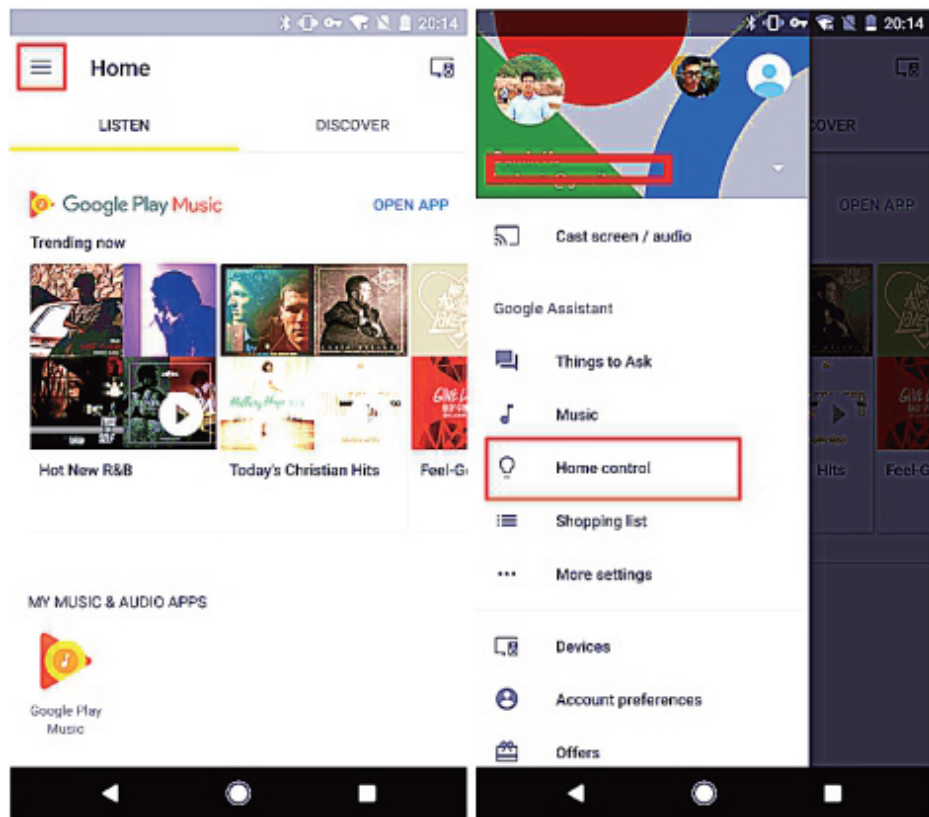

Select your country code. Enter your account name and password in the "Smart Life" app.

Then press "Link Now" to continue. After successful connection, you can assign rooms for your smart devices. Later, you can find the smart devices on the home control list.

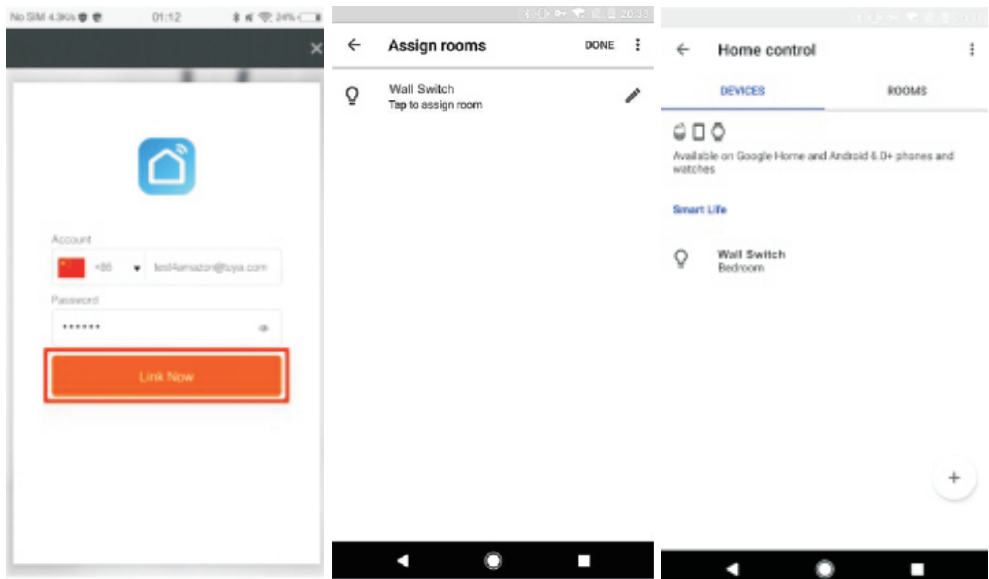

Now you can use your Google Home for voice control of Smart devices.
"Ok, Google, turn on/off the switch/socket in the bedroom."

Ochrona środowiska



Zużyty sprzęt elektroniczny oznakowany zgodnie z dyrektywą Unii Europejskiej, nie może być umieszczany łącznie z innymi odpadami komunalnymi. Podlega on selektywnej zbiórce i recyklingowi w wyznaczonych punktach. Zapewniając jego prawidłowe usuwanie, zapobiegasz potencjalnym, negatywnym konsekwencjom dla środowiska naturalnego i zdrowia ludzkiego. System zbierania zużytego sprzętu zgodny jest z lokalnie obowiązującymi przepisami ochrony środowiska dotyczącymi usuwania odpadów. Szczegółowe informacje na ten temat można uzyskać w urzędzie miejskim, zakładzie oczyszczania lub sklepie, w którym produkt został zakupiony.

CE Produkt spełnia wymagania dyrektyw tzw. Nowego Podejścia Unii Europejskiej (UE), dotyczących zagadnień związanych z bezpieczeństwem użytkowania, ochroną zdrowia i ochroną środowiska, określających zagrożenia, które powinny zostać wykryte i wyeliminowane.

This document is a translation of the original user manual created by the manufacturer.

The product should be regularly maintained (cleaned) by the user or by specialized service points at the user's cost and responsibility. If there is no information about necessary periodic or service maintenance actions in the user manual, the physical condition of the product should be assessed regularly, at least once a week, against that of a physically new product. If any deviation is detected or noted, urgent maintenance (cleaning) or service steps should be taken. Failure to properly maintain (clean) and respond upon detection of a deviation may lead to permanent damage to the product. The warranty does not cover damages resulting from neglect.

Szczegółowe informacje o warunkach gwarancji dystrybutora /
producenta dostępne na stronie internetowej
<https://serwis.innpro.pl/gwarancja>

Simplified Declaration of Conformity

Manufacturer: Dongguan Yewelink Smart Technology Co., LTD
Address: 2nd Floor, Building 2, Yonglida Science and Technology Park, 45
Guangming Road, Dongcheng Street, Dongguan City

The product complies with the directive of the European Parliament and Council 2014/53/EU of April 16, 2014, on the harmonization of the laws of member states regarding the marketing of radio equipment and repealing directive 1999/5/EC.

Declaration of conformity available at the website:
<https://files.innpro.pl/Avatto>

Radio Frequency:
N-TS10: 2412-2472 MHz
N-WOT10: 2402-2480 MHz
Maximum Radio Frequency Power:
N-TS10: 20dBm
N-WOT10: 20dBm