


10MM NARROW FIXED FRAME

PROJECTION SCREEN

INSTRUCTION MANUAL

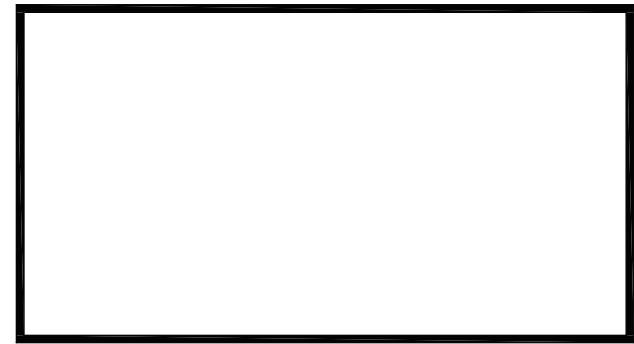

Thank you for choosing to use our product! For your better use of the product, please read and keep this manual carefully before installation and use. Due to the improvement of the product, the product you purchased may not be the same as the description in the manual. We apologize for that!



This manual is only used for 1cm narrow border fixed frame screen (segmented)

PACKING LIST



① Inner frame A × 2



① Inner frame B × 2



① Inner frame C × 2



② Outer frame A × 2



② Outer frame B × 2



② Outer frame C × 2



③ Support rod × 1




④ Glass fiber strip × 2



④ Glass fiber strip × 4



⑤ Screen × 1



⑥ Corner connectors × 4




⑦ Corner connectors × 4




⑧ Tension spring × N



⑨ Pull hook × 1




⑩ Outer frame connector × 2




⑪ M5 single head hexagon stud × 2




⑫ M5*6 Phillips screw × 6




⑬ Corner protection × 4




⑭ Wall bracket × 2



⑮ Wall bracket screw × 4 set



Phillips screwdriver × 1



Spirit level × 1



Gloves × 1



Manual × 1

6.2 Drill holes on the marks on the wall with a percussion drill, insert the rubber plug, screw on the screws, and fix the wall bracket (Figure 13)

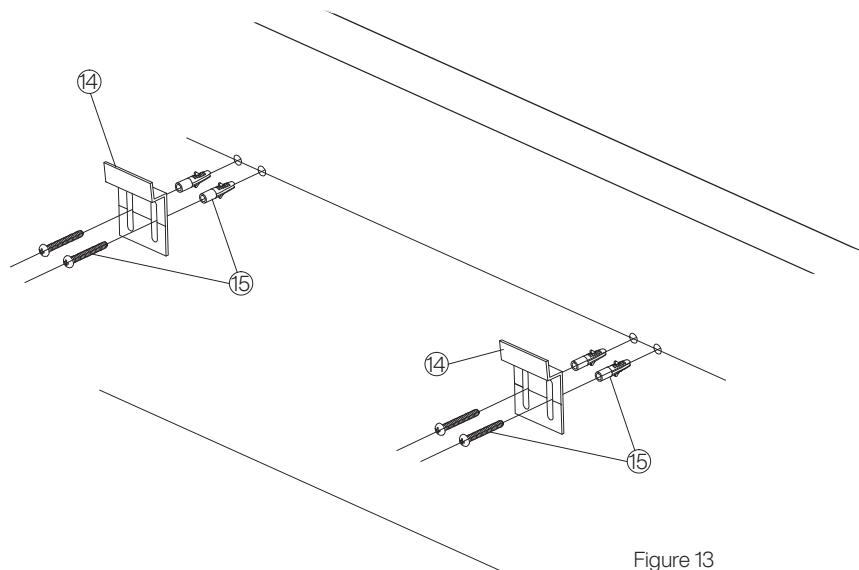


Figure 13

6.3 Hang the assembled screen on the wall (operated by two persons) (Figure 14)


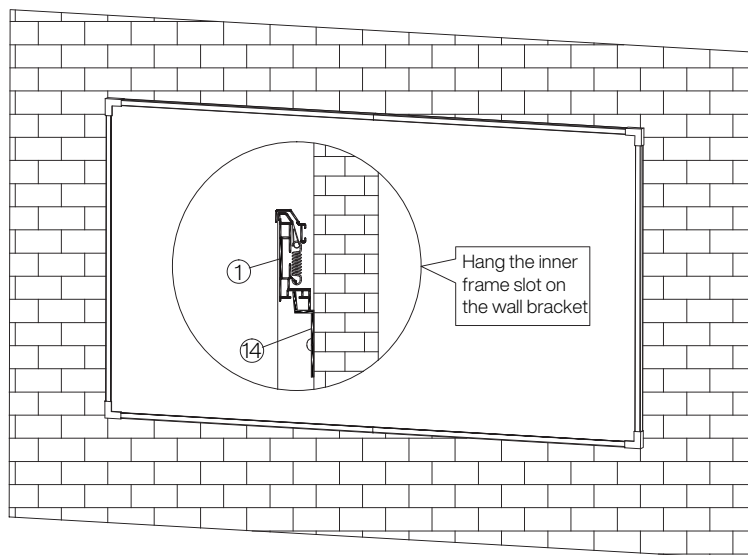


Figure 14

1.0 Precautions

- 1.1 To ensure the projection effect and quality of this product, please observe the following operating requirements.
- 1.2 When assembling, find a suitable size floor or table. The surface must be clean and free of any obstacles. The base or table must be covered with clean materials such as cloth, film, blankets, etc.
- 1.3 Handle with care during installation to prevent personal injury or property damage.
- 1.4 Do not touch the surface of the projection screen with your hands.
- 1.5 Do not touch the projection surface with sharp or hard objects to prevent damage to the screen material. Don't write or draw on the screen.
- 1.6 Keep children away from the screen to prevent accidents.
- 1.7 The surface of the screen must be cleaned and treated regularly, and it is recommended to take care of it once every two weeks. Please use a soft cotton cloth to wipe (dip some water) gently, and it is not advisable to use any chemical cleaners or alcohol.

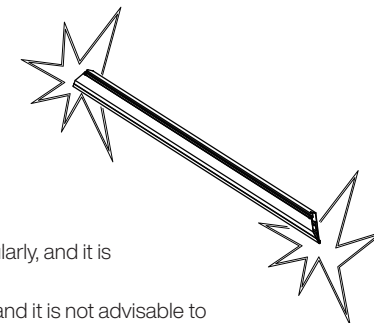

2.0 Assemble the frame

- 2.1 Open the package and check whether the accessories in the box are complete.
- 2.2 Connect inner frame A and inner frame B first (Figure 1)
- 2.3 Insert the 4 corner connectors into the inner frame C (picture 2)
- 2.4 Assemble the four inner frames and struts as shown in the figure below, and lock them with screws after the inner frame is assembled (Figure 2, Figure 3);




Figure 1

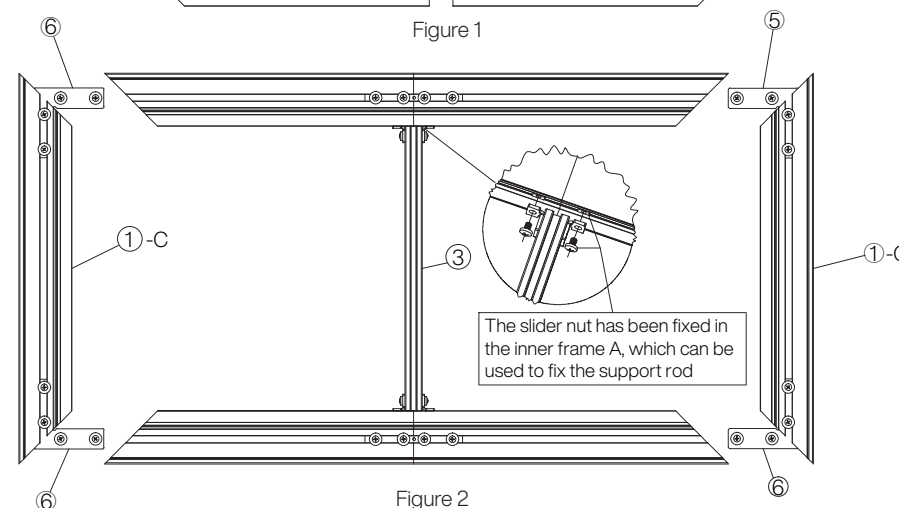


Figure 2

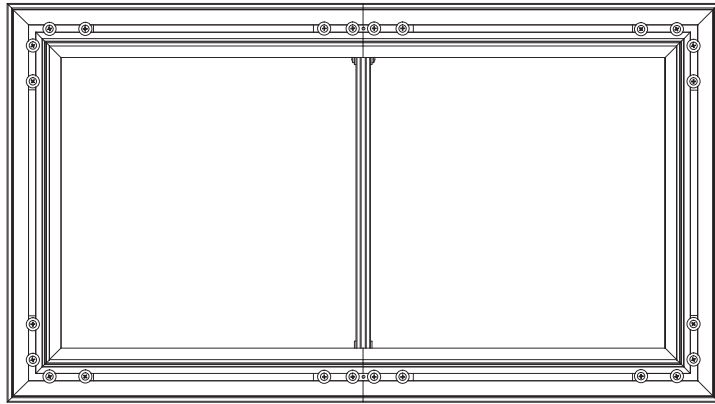


Figure 3

3.0 Assemble the screen

3.1 Wear gloves (to avoid the screen being stained with fingerprints that cannot be erased).

Lay a clean cloth that will not damage the screen on a flat, clean water surface (or ground).

3.2 Take out the screen from the package, turn the screen face down, and the two of them work together to slowly unfold the screen, and then according to the length of the glass fiber strips, take the glass fiber strips insert to around of screen as shown below.

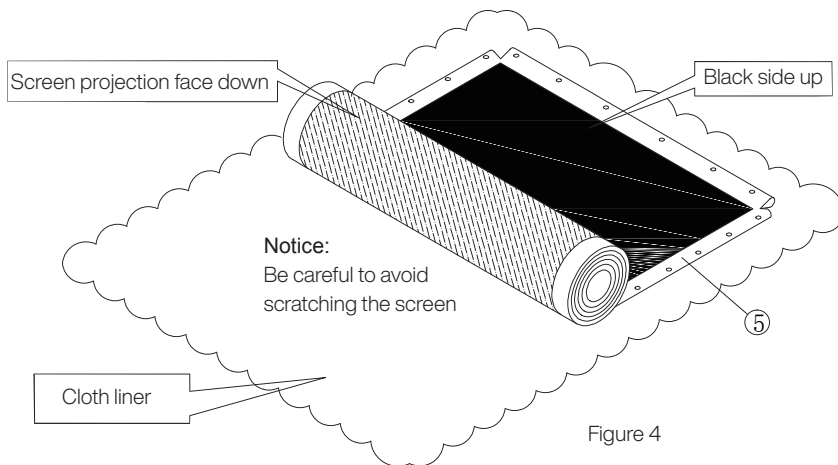


Figure 4

6.0 Screen install

6.1 Install wall hangers on the wall according to screen size. Required tools: level, hammer drill, pencil, ladder, etc. As shown below. Please estimate the installation position of the screen before installing the wall pendants. The height of the lower edge of the screen from the ground is generally about 50~80cm.

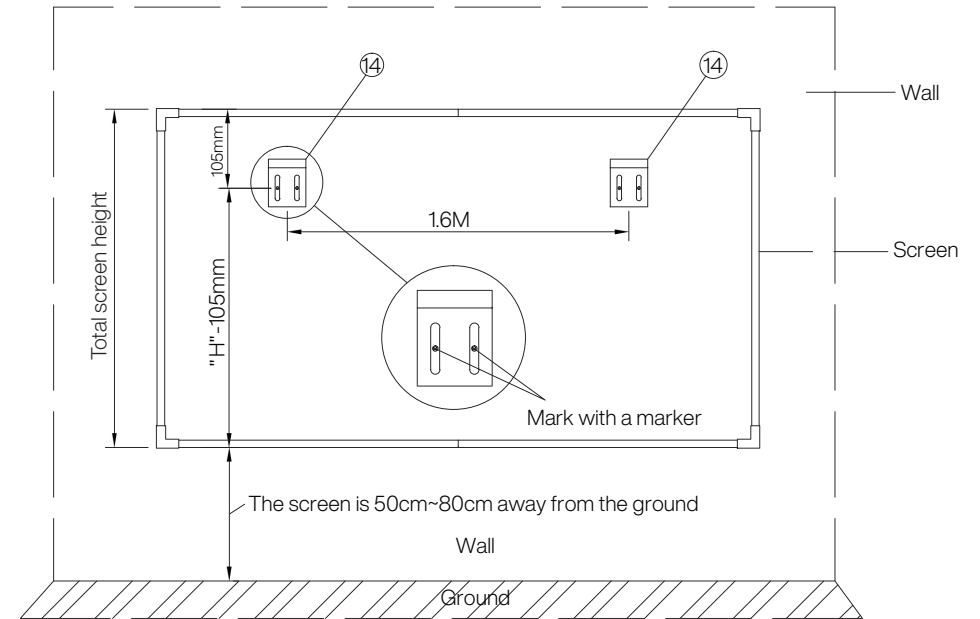


Figure 12

5.2 Put the outer frame against the frame screen, align the four corners, connect the surroundings with corner connector and lock all the screws (Figure 10)

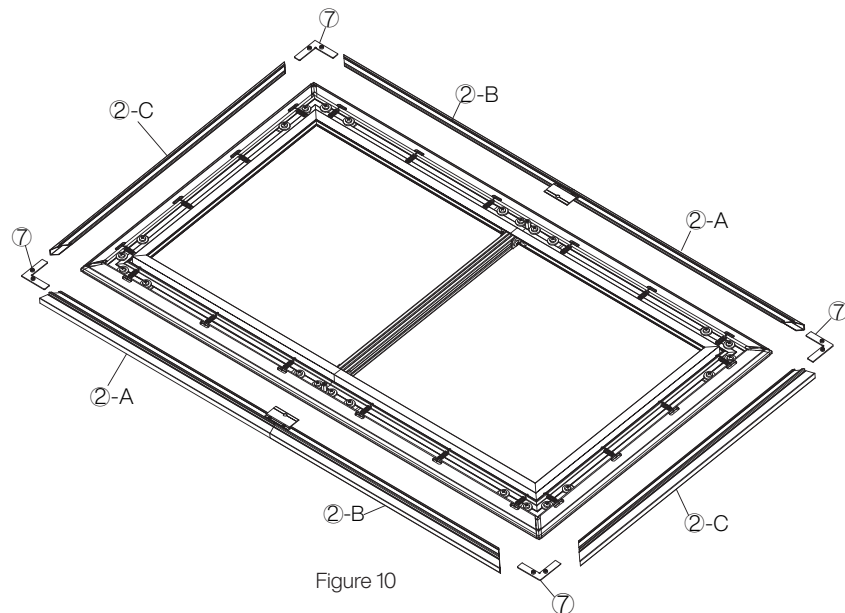


Figure 10

5.3 Use screws to lock the joints of the outer frame on the hexagonal studs, and clip the corner protectors into the slots of the outer frame (Figure 11)

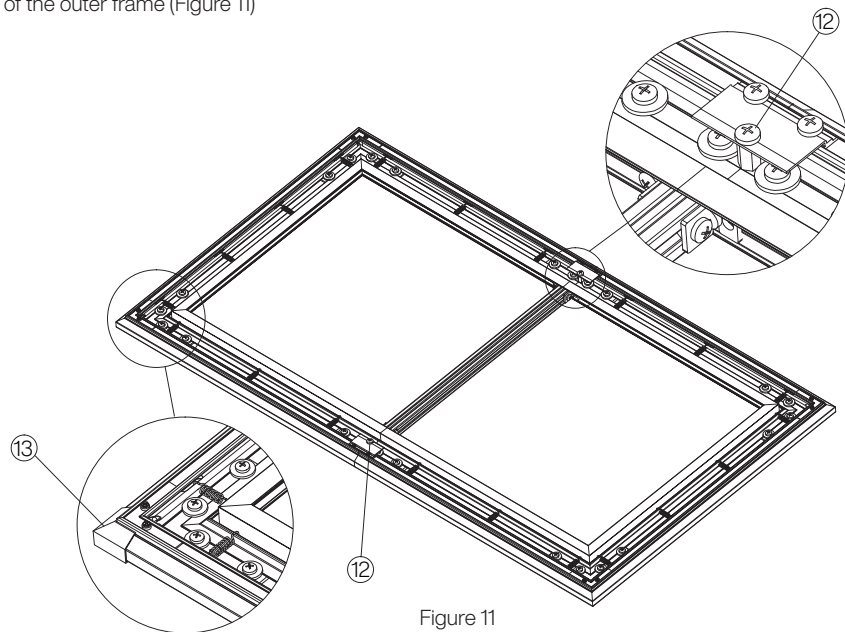


Figure 11

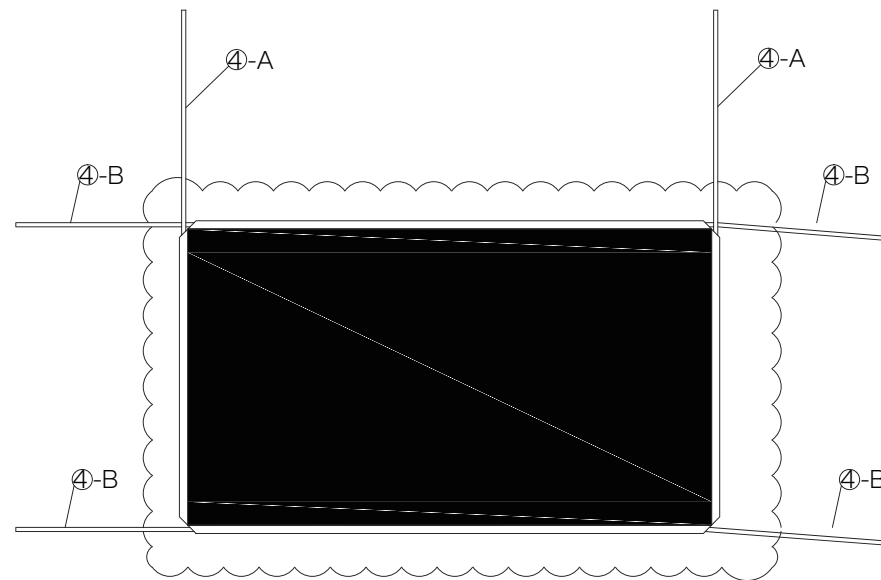


Figure 5



Important note: Please cooperate with two people when assembling, and do not make any actions that may cause the screen to fold or rub against hard objects.

4.0 Assemble curtain and inner frame

4.1 Put the assembled frame on the screen. Align the frame with the line marks on the four corners of the screen (Figure 6)


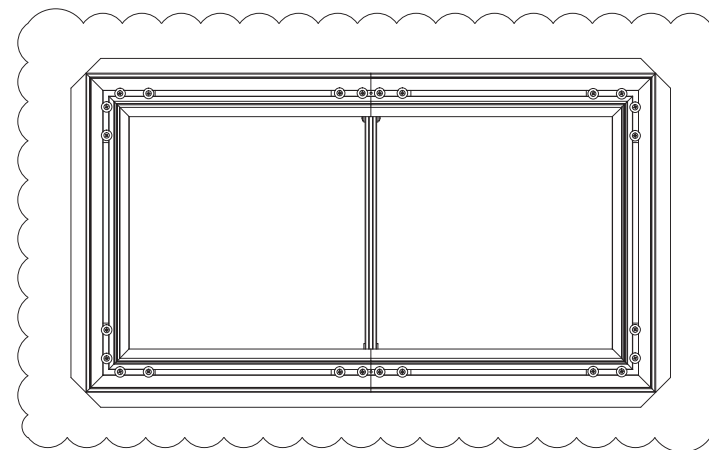


Figure 6

4.2 Adjust the position of the screen and the frame so that the frame is in the middle of the screen, and check the overall flatness of the screen.

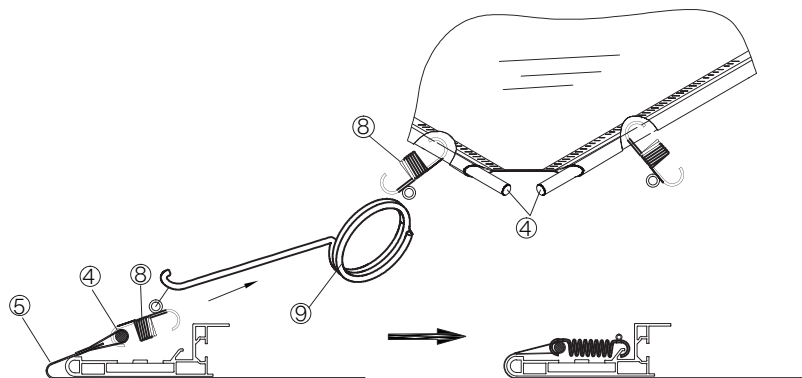

4.3 Hang the curtain on the frame with the tension spring. Please follow the following sequence for hooking tension springs, first install the four corner springs in the order of 1~8; then hang the middle springs 9~12, and finally spring from the middle, and install the other springs symmetrically in turn (Figure 7)

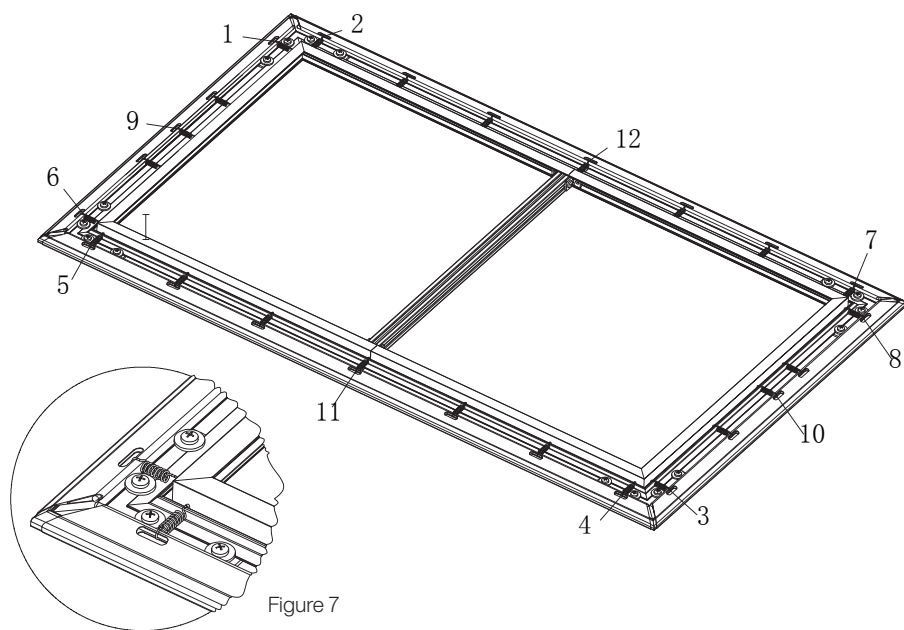


Figure 7

5.0 Outer frame installation

5.1 Splice the outer frame A and outer frame B into a complete frame (Figure 8), and drive the hexagonal studs into the long frame splicing strip (Figure 9)

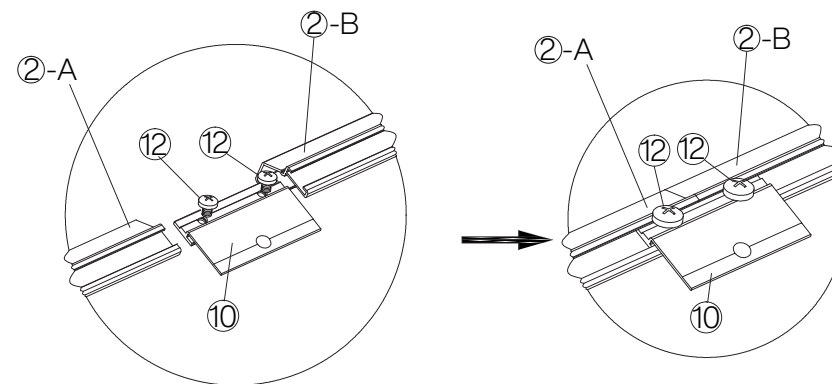


Figure 8

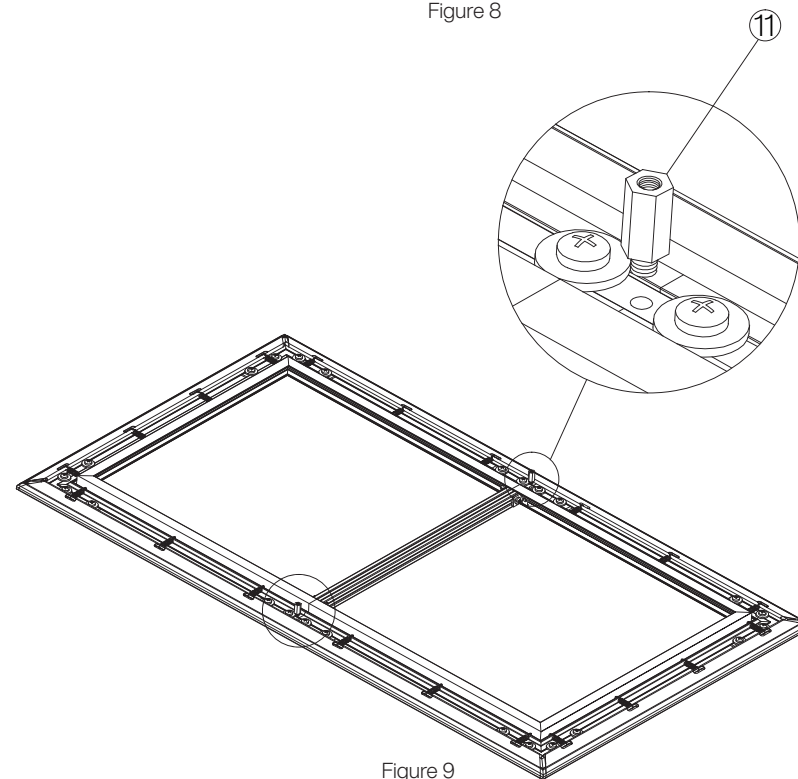


Figure 9