


*请注意本页无需打印, 仅用于版本更新的说明

产品名称(型号)	NEX S2 PRO 螺丝批说明书
材质	150g铜版纸
尺寸	110x70mm
印刷	单黑
装订方式	骑马钉
制图人	林嘉华
版本时间	2025/10/23
最新版本名称	fanttik_S2 PRO_螺丝批 美版说明书 20251023V1.0
变更版本	REV1.0 IC标识变更
备注	封面封底背面不印刷

Fanttik

NEX S2 Pro Cordless Screwdriver

User Manual

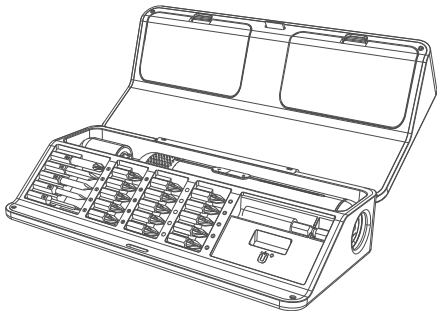

Please read this instruction manual carefully before use and keep it for future reference.

Contents

1.Safety Instructions	02
2.Package Contents	03
3.Product Overview	04
4.Operation and Functions	05
5.Specifications	09
6.Warranty	11

1.Safety Warnings

- Avoid moisture, dust, and drop.
- Do not store the product in extreme temperature environment.
- Stay alert, watch what you are doing and use common sense when operating. Do not operate while you are tired or under the influence of drugs, alcohol or medication.
- This product is not a toy and should not be used by kids under 12 years old.
- This product has built-in battery, do not throw it into fire and should be recycled by local laws and regulations.
- Do not dismantle the machine by yourself. Have your power tool serviced by a qualified repair person or contact us for advice.

2.Package Content



NEX S2 Pro
screwdriver x 1



Storage
case x 1



2-inch
bit x 5



1-inch
bit x 15



Extension
bit holder x 1



90° angle
adaptor x 1

User Manual


User Manual x 1



USB-C charging cable x 1

3.Product Overview

1. Bit Chuck
2. LED Light
3. Torque Setting Knob
4. Forward/Reverse Rotation Button
5. Energy Bar
6. Battery Indicator
7. USB Type-C Charging Port
8. Storage Case Unlock Button
9. Screwdriver Bits
10. Extension Bit Holder
11. Bit Magnetizer
12. 90° Angle Adapter
13. Storage Space

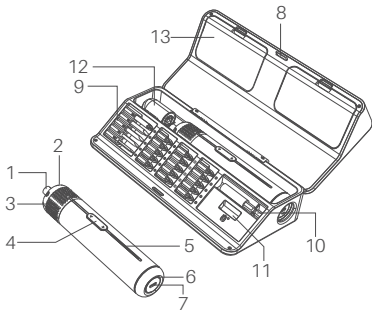

4.Operation and Functions

Open the storage case

- Press the unlock button located in the middle of the case lid, then open the case.



Install screwdriver bits

- Take a bit from the magnetic bit slots in the storage case and insert it into the screwdriver chuck. You can also use third-party 1/4" bits.



Use Extension Bit Holder or 90° Angle Adapter

- 1.Insert the Extension Bit Holder or 90° angle adapter into the screwdriver chuck.
- 2.Attach a bit to the chuck at the end of the Extension Bit Holder or 90° angle adapter.



Torque settings

- Rotate the Torque Setting Knob to select from seven torque levels: 0.5, 1.0, 2.0, 3.0, 4.0, 5.0, or 6.0 N·m.



Tighten or loosen screws

- Press the Forward/Reverse Rotation Button on the screwdriver to tighten or loosen a screw.



Energy bar

1. When adjusting the torque setting, the length of the Energy Bar changes accordingly. Higher torque levels result in a longer Energy Bar.
2. When the Forward/Reverse Rotation Button is pressed, the Energy Bar displays a flowing effect accordingly.



Turn on/off the LED light

- The LED light automatically turns on when the Forward/Reverse



Rotation Button is pressed. The LED light remains on for 10 seconds after the button is released.

Power indicator

- When the battery level drops below 20% during use, the indicator blinks red rapidly.
- During charging, the indicator blinks green slowly.
- When the battery is fully charged, the indicator turns solid green.



Power Indicator

Battery charging

- This screwdriver is equipped with a universal Type-C charging port and includes a USB charging cable. A charger is not included; please use a 5V charger for charging.
- The screwdriver supports a maximum charging input of 10W(5V/2A).



Type-C
Port

Manual operation

This screwdriver can be used manually regardless of the torque setting on the knob. Use it manually If a screw is too tight to loosen or if you need to tighten a screw beyond the motor's capability. A slight rotational play (about half a turn) is normal; after that, the gearbox will lock in place. Note that the screwdriver supports a maximum manual driving torque of 8 N·m (70.8 in-lb); exceeding this limit may damage the transmission gearbox.

5.Specifications

Product Name	Cordless screwdriver
Product Model	NEX S2 Pro
Product Dimension	9.7x4.6x2.0 inches(246x116x52mm)
Screwdriver Dimension	Φ1.46x7.22 inches(Φ37x183.5mm)
Net Weight(with storage case)	2.27lb(1028g)
Torque Control	0.5/1.0/2.0/3.0/4.0/5.0/6.0N·m
Max. hard torque	6.0 N·m
Max. manual torque	8.0 N·m
Rotation Speed (unloaded)	250 RPM
Battery Capacity	2000 mAh / 7.4 Wh
Rated Voltage	3.7 V
Charging Input	5 V / 2 A
Charging Time	120-180 minutes

Bit specifications

Bit Shank: 1/4-inch (6.3mm) hex shank

Bit Material: Coated S2 Steel

Included Bit Types

 PH0, PH1, PH2

 SL3, SL4, SL5

 S1, S2

 H3, H4, H5, H6

 PZ1, PZ2, PZ3

 TR10, TR15, TR20, TR25, TR30

*Note: PH0, PH1, PH2, SL3, and SL4 are 2-inch (50mm) bits;
all others are 1-inch (25mm) bits.

6.Warranty

This product is covered by a **12-month** limited warranty for manufacturing defects.



Lienco SAS
8 Rue Marcel Cerdan, 77600,
Bussy Saint Georges, France
Email: ruoyu@lienco.eu
Phone/Fax: +33766929910



CET Product Service Ltd.
Beacon House Stokenchurch Business
Park, Ibstone Rd. Stokenchurch High
Wycombe HP14 3FE UK
Email: info@cetproduct.com
Phone/Fax: +44 7419325266



FR

Cet appareil
et sa batterie
se recyclent

À DÉPOSER
EN MAGASIN

ou

À DÉPOSER
EN DÉCHÈTERIE

points de collecte sur www.quefairedemesdechets.fr
privilégiez la réparation ou le don de votre appareil !



FR



[Service hotline available in the U.S. and Canada only]

929-693-6066 MON-FRI 9AM-5PM[ET]

www.fanttik.com

support@fanttik.com

Manufacturer/Hersteller: METASEE LLC

Address/Adresse: 12 GREENWAY PLZ STE 1161A

HOUSTON, TX 77046-1203

Made in China

CAN ICES(B)/NMB(B)

