

fine

M6 USER'S GUIDE



Version:22-05

CONTENTS

QUICK START	4-7
OPERATING RANGE	7-8
MONITOR	8-9
RESTORE TO FACTORY SETTINGS	9-10
CHARGE	11
SPCIFICATION	11
OPERATING NOTES	12

WHAT'S IN THE BOX?

Microphone*1

Receiver*1


Type C cable (30cm) *1

Storage Bag*1

User's Manual*1




MICROPHONE

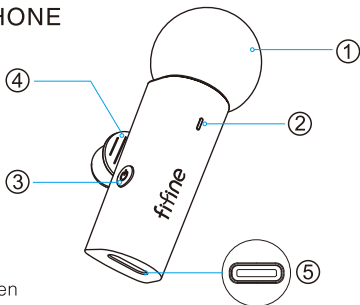

- ① Windscreen
- ② Indicator light
 - Mute (red light)
 - Low battery (red light blinking)
 - Fully charged (green light)
 - Paired (blue light stays on)
 - Unpaired (blue light blinking)
- ③ Power button
 - Press: Mute/Unmute
 - Press and hold for 3 seconds: ON/OFF
- ④ Clip: 360° adjustable
- ⑤ Type-C port: Charging/Monitoring

RECEIVER

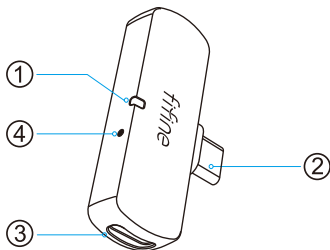


- ① Indicator light
 - Paired (blue light stays on)
 - Unpaired (blue light blinking)
- ② Type-C connector
- ③ Type-C port : Charging/Monitoring
- ④ Pairing button (inside the hole)


QUICK START

For Android phones/tablets


1. Press and hold the power button on the microphone for 3 seconds until the indicator light blinks blue.

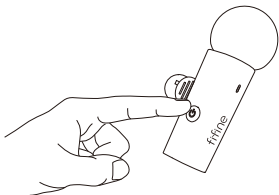

2. Plug the receiver into the type C port on your phone/ tablet.

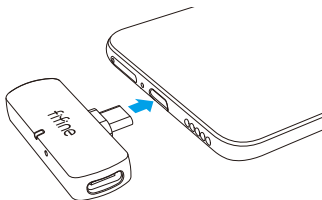


3. The microphone will pair with the receiver within 5 seconds. (The blue light will stay on when connected.) If it doesn't, please reset the mic set manually (refer to page 10-11).

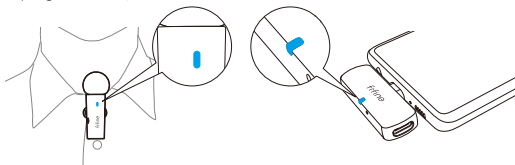


4. After the microphone is connected, open the camera/recording app on your phone/tablet to test the microphone. You could use these ways to listen to play back.

- (1) Unplug the receiver and listen to play back from the built-in speaker of phone/tablet.

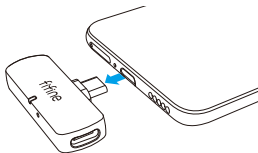

(2) Plug the earphone in the Type-C port on microphone/receiver.

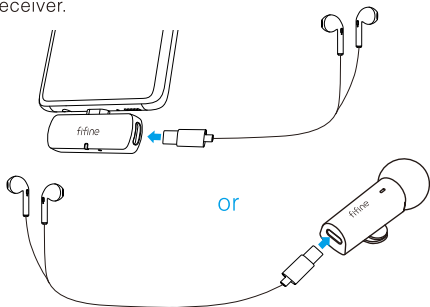

(3) Use bluetooth earphone.

Tips:


- If the receiver light is off, please check if you need to enable OTG from the phone settings so that your phone will supply power for the receiver. If there's a poor connection due to the phone case, please remove it and make sure the receiver is plugged all the way in your phone/tablet.



- The input volume of mic and monitoring cannot be adjusted.

For iPhone/iPad

You need a genuine Apple Lightning(male) to USB (female) adapter and a USB(male) to Type-C(female) adapter for connecting the receiver to the iPhone/iPad. (Adapters are not included.)

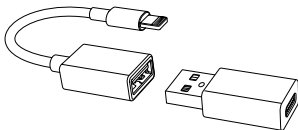

OPERATING RANGE

Indoor: 65ft (maximum)

Outdoor: 50ft (maximum)

Tips:

- The range may be affected by obstacle such as large metal objects.
- If you go beyond the suggested range, the indicator on mic and receiver may blink blue because of losing connection.

MONITOR


Plug the earphone (Type-C connector) into the microphone or receiver for real-time monitoring. You will hear both the sound of your device and microphone.

When the earphone is plugged into the microphone (not the receiver), you will hear these indicating words during the operation.

- (1) Power on (when you turn on the mic)
- (2) Power off (when you turn off the mic)
- (3) Connected (when the mic pairs with the receiver)
- (4) Disconnected (when the mic doesn't pair with the receiver)
- (5) Mic off (when you mute the mic)
- (6) Mic on (when you unmute the mic)

Tips

- If your earphone has 3.5mm connector, you will need a Type C(male) to 3.5mm(female) digital to analogue adapter. (This adapter is not included.)




- If your headphone transmits digital signal, it may be not compatible with this mic, and you may not be able to hear the sound of the mic.


RESTORE TO FACTORY SETTINGS

If the indicator light keeps blinking blue(unpaired), please follow these steps to reset.


1. Unplug the receiver and turn off the microphone.
2. Turn on the microphone, and plug the receiver into your phone/tablet. (Indicator light on the receiver and microphone becomes blinking.)

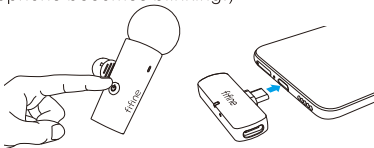

3. Use a pin to press the pairing button inside the tiny hole on the receiver.

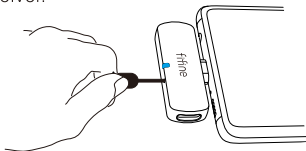

4. The blue light on the receiver will stop blinking for approximately 1 second. At this time, press the power button on the microphone for twice in a row quickly.



5. A few seconds later, the flashing light on receiver and microphone will stay on and the receiver pairs with the microphone successfully.

CHARGE

1. The microphone has built-in battery. Indicator light will turn green when it's fully charged. It can last for 5-6 hours after charging 2 hours.
2. The receiver doesn't have built-in battery. It relies on the phone/tablet for power. You could also use the Type-C port to charge your phone while using the mic to avoid low battery. (Note: iPhone/iPad and some of the Android phones does not support this function.)
Tips: After the receiver disconnecting from the device for 5 minutes, the mic will shut down by itself to save power.

SPCIFICATION

Frequency: 2.4GHz~ 2.483GHz

Polar Pattern: Omnidirectional

Power Supply: 5V

Sensitivity:- 32dBV(1KHz 94dBSL)

Sampling Rate Conversion: 16bit/48KHz

Max. SPL: 108db

Frequency response: 50Hz~15kHz

OPERATING NOTES



Keep the unit away from water when using it.



Keep the unit away from fire.



Since it's a wireless device, please keep it away from other interfering sources.



Don't take apart the mic set



Please use the standard power supply, high voltage may damage the unit.



Dispose the waste mic set properly. Place it into the recycle bin and don't litter it.

CONTACT US

Get Social: 

Facebook page:<http://bit.ly/FifinePage>

Contact Info: 

E-mail:web@fifine.cc

More product inquiries can be found on the website.

Company Website:<https://fifinemicrophone.com/>

WARRANTY

Fifine microphone warrants its hardware product defects in materials and workmanship for a period of one year from the date of original retail purchase, provided the purchase was made from authorized Fifine microphone dealer. This warranty is void if the equipment is altered, misused, mishandled, suffers excessive wear or is serviced by any parties not authorized by Fifine Microphone. For warranty service, contact your local distributor or web@fifine.cc.