


AIRBANK

POCKET SE

TINY BICYCLE TIRE INFLATOR

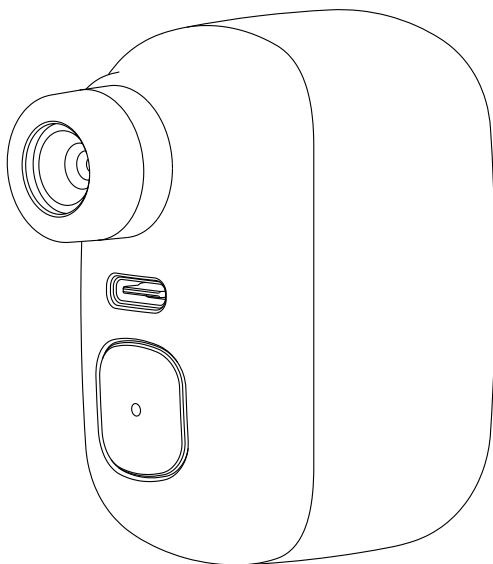


Contact: service@airbankpump.com


Model: AS100 V03

⚠ Warning


- 1 For TPU inner tubes with resin valves, be sure to connect them with an extension air hose (available for separate purchase), or the valves may melt due to overheating.

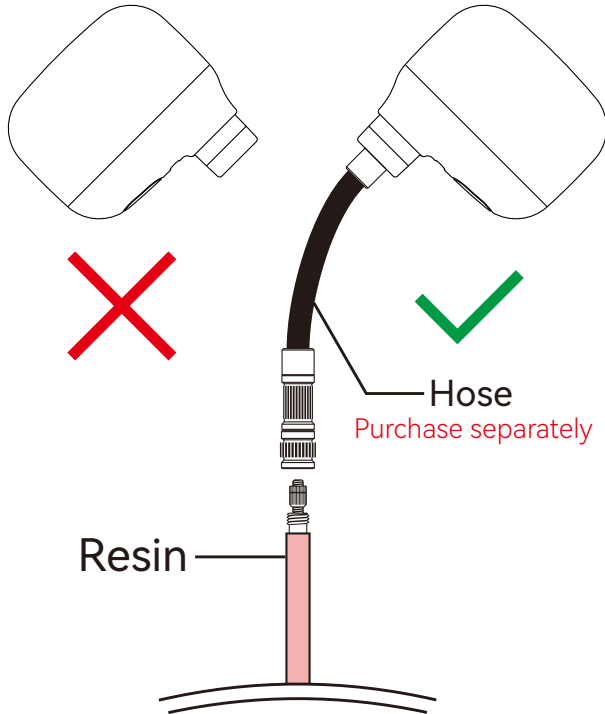

- 2 The valve maybe very hot when just finished inflating.
Be careful not to burn your fingers.

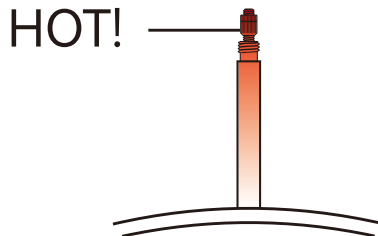

Packing List



Inflator




Pillar

Seal Part




Cable



Waterproof Bag

Product Details & Specifications

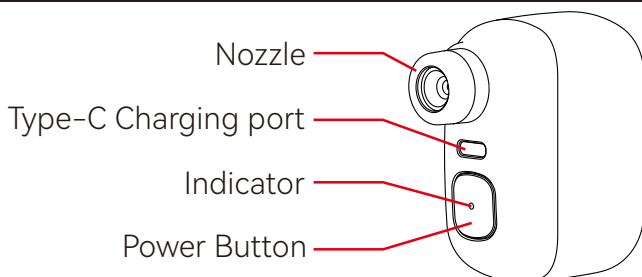

Size: 64.5 × 64 × 31 mm

Battery: 7.4 V 300 mAh

Current: 2.5 – 7.0 A

Charging mode: Type-C 5 V 2.0 A


Weight: 93 g

Using time: about 200 sec


Max pressure: 100 PSI

Air Nozzle Adaptation

The inflator is ready for Presta valves right out of the box.
For Schrader valves, reassemble the nozzle as shown below.

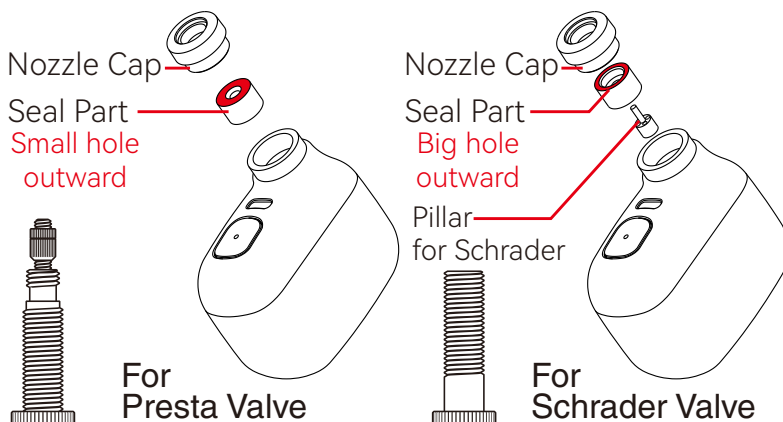

Operation



The color indicates the battery level:


Green: 80%~100%

Yellow: 50%~80%

Red: <50%

1 Press the **Power Button** to active the inflator, and the indicator will light up.


2 Press the **Power Button** twice within 3 seconds after activation to start inflating.



Always loosen the nut first.


3 Thread the inflator onto the valve stem and hold tight.

4 Press the **Power Button** again to stop inflating and turn off the inflator.

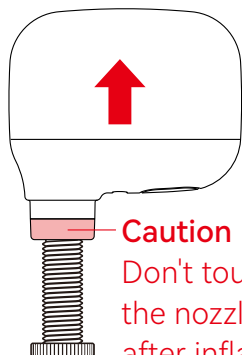

Caution hot!
Don't touch the nozzle after inflation.

5 Remove the inflator.



WARNING
Keep clear of the charging port while operation.

Notes

1. Fully charge the pump before use.
2. The pump may get hot during operation. Please be cautious of burns when using for an extended period.
3. Press the pump against the valve before and during inflation, and adjust the position to prevent air leakage.
4. It is normal to feel a sense of traction when pulling the pump off a presta valve after inflation.

Charging

Charge it with a suitable charger. It takes about 25 minutes to fully charge the inflator, during which time the indicator light will keep flashing in red, and always on green when finished. It can pump for about 200 s on one full charge.



Working performance when full charged:

Tire Type	Pressure	Inflating Time	Available Times
700C25	0-60PSI	50~60 sec	4
700C25	0-80PSI	80~90 sec	2
700C25	0-100PSI	150~160 sec	1
26x1.95	0-35PSI	70~80 sec	2
26x1.95	0-50PSI	120~130 sec	1

The experimental data are for reference only.

Manufacturer Information

Company:

Chengdu Chendian Intelligent Technology Co., Ltd.

Address:

No.88 Tianchen Road, Chengdu, Sichuan Province, China

Warranty:

Free repair or replacement within 2 years for damage not caused by human factors.

Contact:

service@airbankpump.com

Table of Hazardous Substances Contained in the Product

Part Name		Enclosure (Housing)	Motor	Battery Cell	PCB
 Hazardous Substances	Di(2-ethylhexyl) Phthalate (DEHP)	○	○	○	○
	Butyl Benzyl Phthalate (BBP)	○	○	○	○
	Di-isobutyl Phthalate (DIBP)	○	○	○	○
	Dibutyl Phthalate (DBP)	○	○	○	○
	Polybrominated Diphenyl Ethers (PBDEs)	○	○	○	○
	Polybrominated Biphenyls (PBBs)	○	○	○	○
	Hexavalent Chromium [Cr(VI)]	○	○	○	○
	Cadmium (Cd)	○	○	○	○
	Mercury (Hg)	○	○	○	○
	Lead (Pb)	○	○	○	○

Notes1: ○ : indicates that the content of the hazardous substance in all homogeneous materials for this part is below the limit value specified in International Standard.

✕ : indicates that the hazardous substance is present in at least one homogeneous material for this part at a level exceeding the limit value specified in International Standard.

Notes2: For parts not listed above, the content of hazardous substances is below the limit values specified in the International Standard for the Restriction of the Use of Hazardous Substances in electrical and electronic products.



FR
Cet appareil,
ses accessoires,
et batterie
se recyclent

À DÉPOSER
EN MAGASIN



À DÉPOSER
EN DÉCHÈTERIE



OU

Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !



MADE IN CHINA