

LEPRO 640005-DW-2 Ηλιακός λαμπτήρας, σετ 2 τεμαχίων

LEPRO · EAN 4894495038916

Machine translation from Polski. In case of doubt the manufacturer's original document prevails.


Lepro



Solar lamp
User manual

Manufacturer
LE Innovation Limited
One Spencer Dock, North Wall Quay, Dublin 1, D01 X9R7, Ireland
www.lepro.de
+49 800-723-6202 cs@lepro.de


Made in China

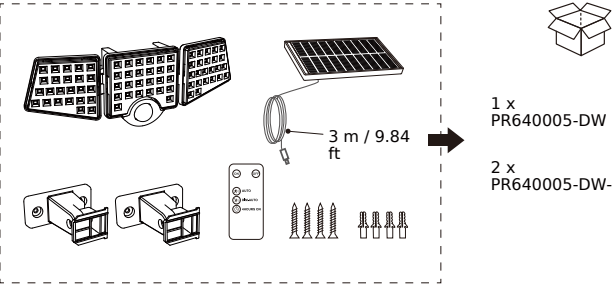


Model No.: PR640005-DW PR640005-DW-2

14 W, 3.7V, 3.78 A, 6500 K, IP 65, -20 °C ~ 40 °C / -4 °F
~ 104 °F
3.7V 1800mAh 6.66Wh (Battery)


Detection range




1

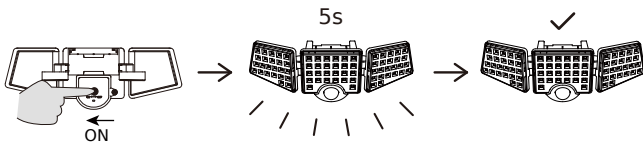


2

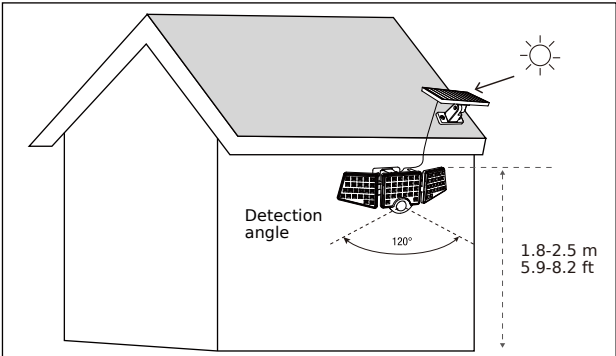


3

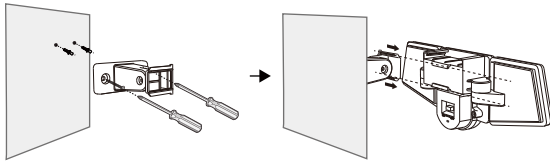


4

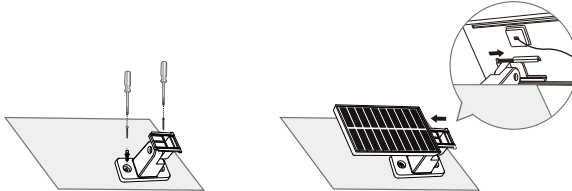


5




6

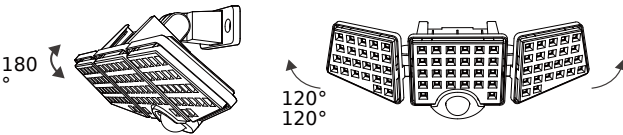


7

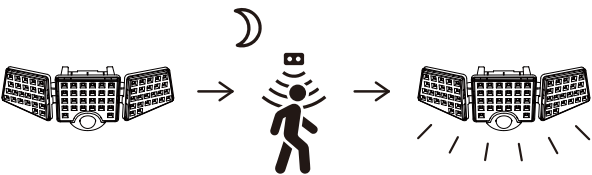

8

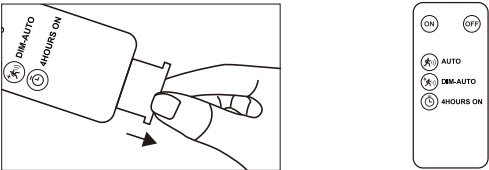

9

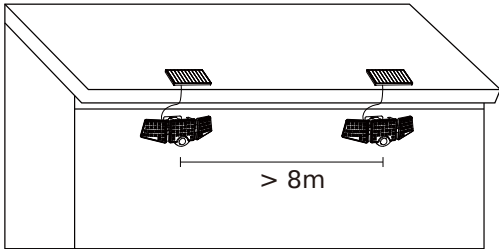


(Safety information)



- a. After switching the switch to the ON position, the light will illuminate for 5 seconds and then turn off, indicating that the device has been successfully activated. (If the light does not work, place it in a location exposed to direct sunlight and charge for 6-8 hours before first use.) (Fig. 1)
- b. Wall light: recommended mounting height 1.8-2.5 m. Solar panel: choose a sunny location. (Fig. 2)
- c. Ensure that the connection cable is well connected, turn on the switch, and adjust the angle of the lamp. (Fig. 5)
- d. None of the rotating parts should be turned at too great an angle, as this may cause a break in the internal circuit connection.
- e. After switching the switch to the ON position, the wall light will only turn on when the ambient light level is below 20 lux and motion is detected. (Fig. 7)
- f. After a full charge, the number of working cycles is approximately 200 (20 seconds each). The light will automatically turn off after 20 seconds if no motion is detected within the sensor range.
- g. The number of working cycles depends on the amount of electricity stored during the day, which is influenced by the intensity and duration of sunlight.
- h. Temperature affects the sensitivity of the PIR sensor, causing changes in the detection range. The higher the temperature, the shorter the detection range.
- i. If the lamp does not turn on after several days of continuous rainy or cloudy weather, it means that the battery is depleted. The lamp will function normally again at night after a sunny day.
- j. The light source in this fixture is not replaceable; when the light source reaches the end of its lifespan, the entire fixture must be replaced.
- k. Remove the insulating film before use. (Fig. 8)
- l. Turn on the switch on the lamp, and the device will default to AUTO mode.
- m. Remote control:
ON: Turn on the light. OFF: Turns off the light.
AUTO: The light remains off at night and automatically turns on at high brightness upon detecting motion (PIR).
DIM-AUTO: The light remains in dim mode at night and automatically turns on upon detecting motion (PIR).
4 HOURS ON: The light remains on at low brightness for 4 hours and then switches to AUTO mode.
- n. If the remote control is running low on power, it should be disassembled and the batteries replaced according to the diagram below. Batteries should be stored out of reach of children and pets to prevent accidental swallowing.
- o. The minimum distance between individual lamps should be 8 m; otherwise, mutual interference may occur. Ensure that there are no other light sources nearby that could interfere with the sensor's operation. (Fig. 9)

* This product is subject to the provisions of the European Directive 2012/19/EU. The symbol of the crossed-out wheeled bin indicates that the product requires selective waste collection in the European Union. This applies to both the product itself and all accessories marked with this symbol. Products marked with this symbol must not be disposed of with normal municipal waste but should be taken to a collection point for recycling electrical and electronic equipment. This recycling symbol indicates, for example, an item or parts of material as valuable for recycling. Recycling helps reduce the consumption of raw materials and protect the environment.



If the remote control starts to lose power, it should be disassembled and the batteries replaced according to the diagram below.

WARNING

- DANGER IN CASE OF SWALLOWING: This product contains a button cell or coin battery.
- Swallowing a battery can cause DEATH or serious injury.
- A swallowed button or coin battery can cause internal chemical burns within 2 hours.
- NEW AND USED BATTERIES MUST BE KEPT OUT OF REACH OF CHILDREN
- If you suspect a battery has been swallowed or inserted into any part of the body, seek medical attention immediately.



1. Remove used batteries and immediately recycle or dispose of them according to local regulations and keep them out of reach of children. DO NOT dispose of batteries in municipal waste or incinerate them.
2. Even used batteries can cause serious injury or death.
3. For information on what to do, contact your local poison control center.
4. The compatible battery type is CR2025 3 V.
5. Single-use batteries must not be charged.
6. Do not force discharge, charge, disassemble, heat above 50°C/122°F, or incinerate. Such actions may cause injury due to gas release, leakage, or explosion, leading to chemical burns.
7. Ensure that batteries are installed correctly according to polarity (+ and -).
8. Remove and immediately recycle or dispose of batteries from devices that are not used for an extended period, according to local regulations.
9. Always securely close the battery compartment. If the battery compartment does not close properly, stop using the product, remove the batteries, and keep them away from children.

Environmental protection



Waste electrical and electronic equipment marked according to the European Union directive must not be placed together with other municipal waste. It is subject to selective collection and recycling at designated points. By ensuring its proper disposal, you prevent potential negative consequences for the natural environment and human health. The system for collecting used equipment complies with locally applicable environmental protection regulations regarding waste disposal. Detailed information on this can be obtained from the municipal office, waste management facility, or the store where the product was purchased. The product meets the requirements of the so-called New Approach directives of the European Union (EU) concerning safety, health protection, and environmental protection, identifying hazards that should be detected and eliminated.



This document is a translation of the original user manual created by the manufacturer.

Detailed information on the distributor/manufacturer warranty conditions is available at the website <https://serwis.innpro.pl/gwarancja>

The product should be regularly maintained (cleaned) by the user or through specialized service points at the user's cost and responsibility. In the absence of information about necessary maintenance or service actions in the user manual, the user should regularly, at least once a week, assess the physical condition of the product against that of a physically new product. If any deviation is detected or observed, urgent maintenance (cleaning) or service steps should be taken. Failure to properly maintain (clean) and respond when a deviation is detected may lead to permanent damage to the product. The warranty does not cover damages resulting from neglect.

Importe r: **INNPRO**

INNPRO Robert Błędowski sp. z o.o.
ul. Rudzka 65c
44-200 Rybnik, Poland
tel. +48 533 234 303
hurt@innpro.pl
www.innpro.pl

Battery information:
Type: li-ion
Net weight: 0.045 kg
Capacity: 1800 mAh
Exceeded permissible cadmium content (0.002%) or lead (0.004%): no

Responsible entity in the EU:
LE Innovation Limited
One Spencer Dock, North Wall Quay 1
D01 X9R7 Dublin, Ireland
cs@lepro.de