


封面

120 mm


120 mm

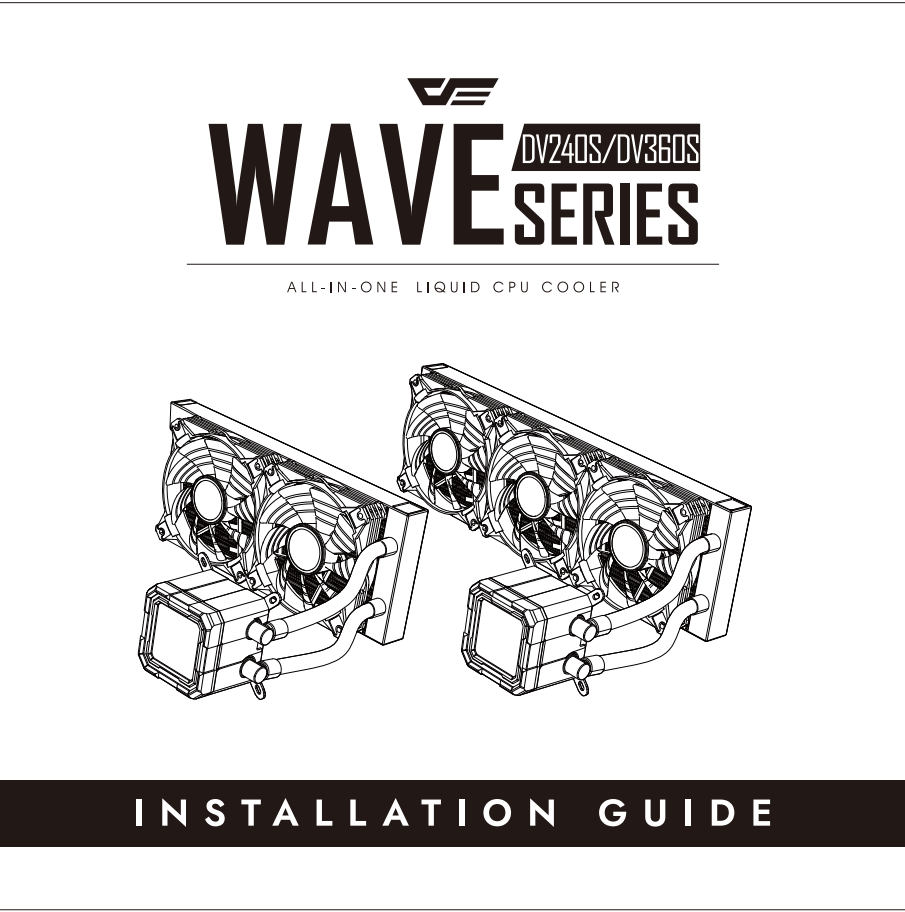


PART LIST

A Radiator Fan DV240S*2 DV360S*3	B Radiator Screws DV240S*6 DV360S*12	C Fan Screw DV240S*6 DV360S*12	D Intel Backplate x1
E AMD Side Buckle x2	F AMD Bracket x1	G Spring Screw x2	H Intel Clip x1
I Light guide plate x1	J Mounting Screw x4	K Rubber Washer x4	L Thermal Grease x1
M PWM Connector x1	N Intel 1700 Standoff Screws x4	O Intel 115x Standoff Screws x4	P Intel 20xx Standoff Screws x4
Q USB 2.0 TO Type-C x1			


STEP 1 - INTEL/AMD

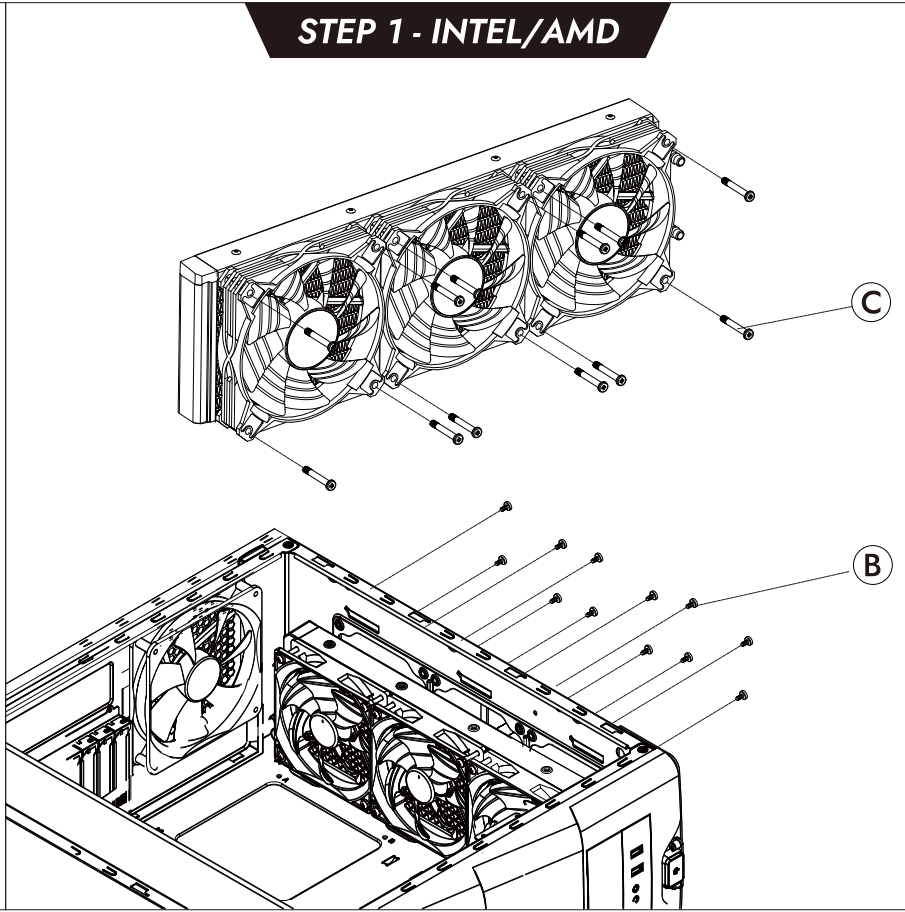


STEP 2 - INTEL/AMD

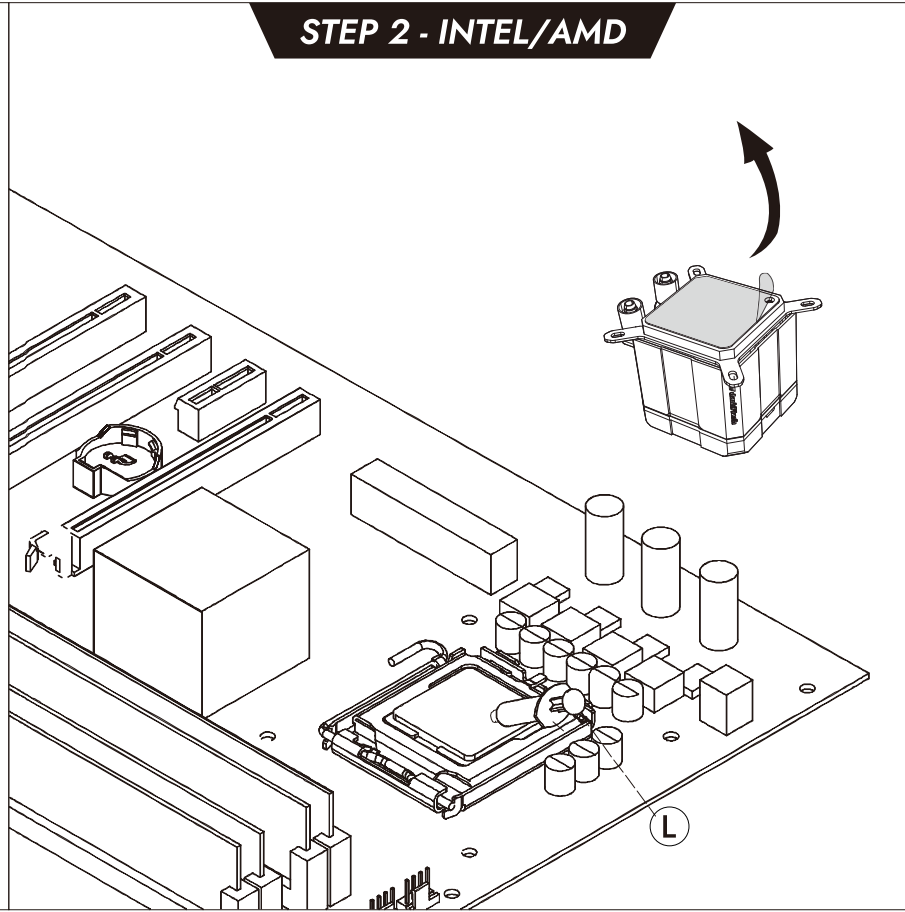


STEP 3 - INTEL/20XX

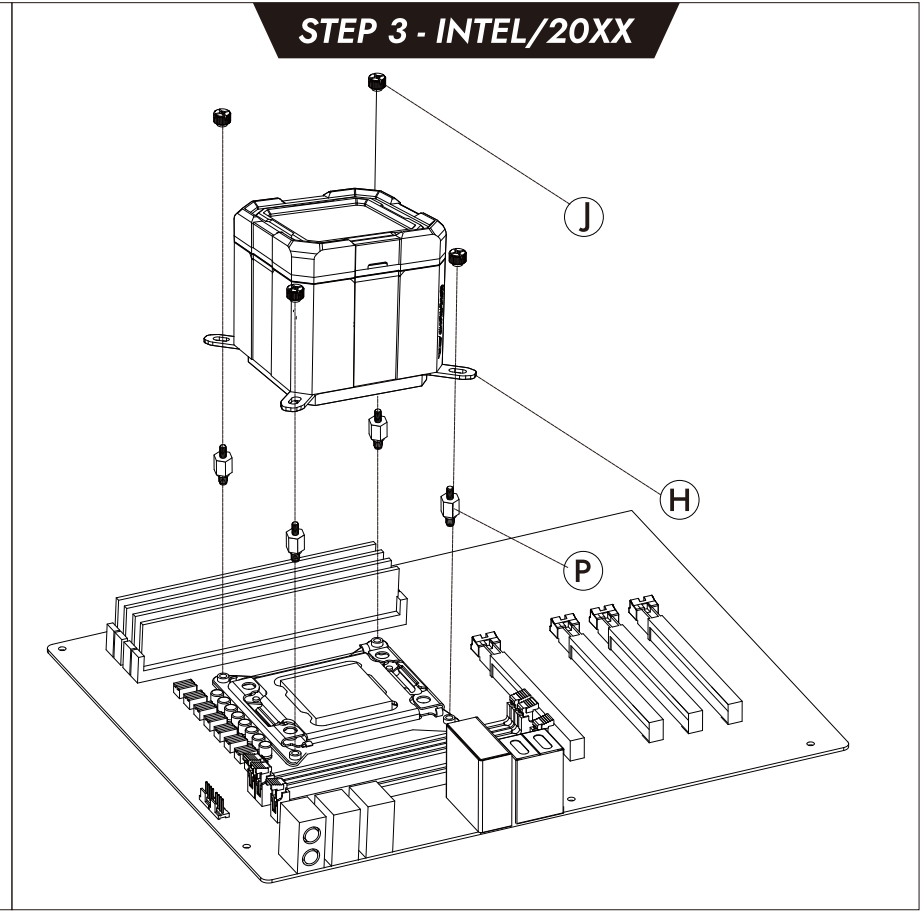


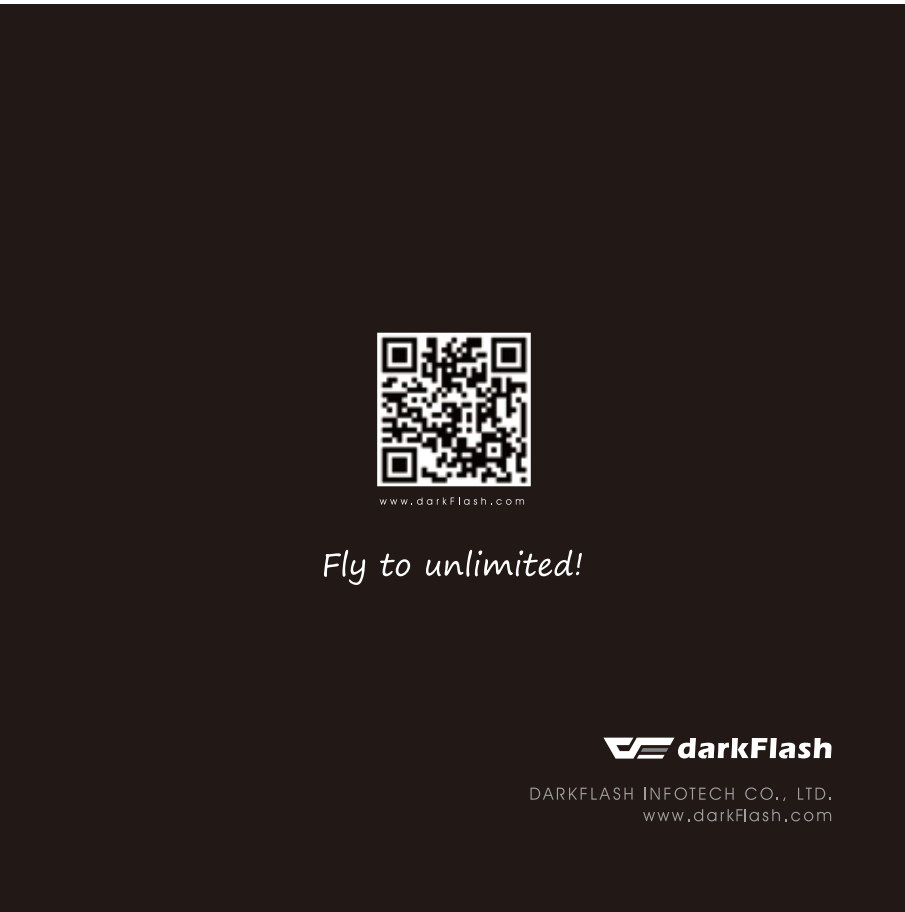


STEP 4 - INTEL 115X

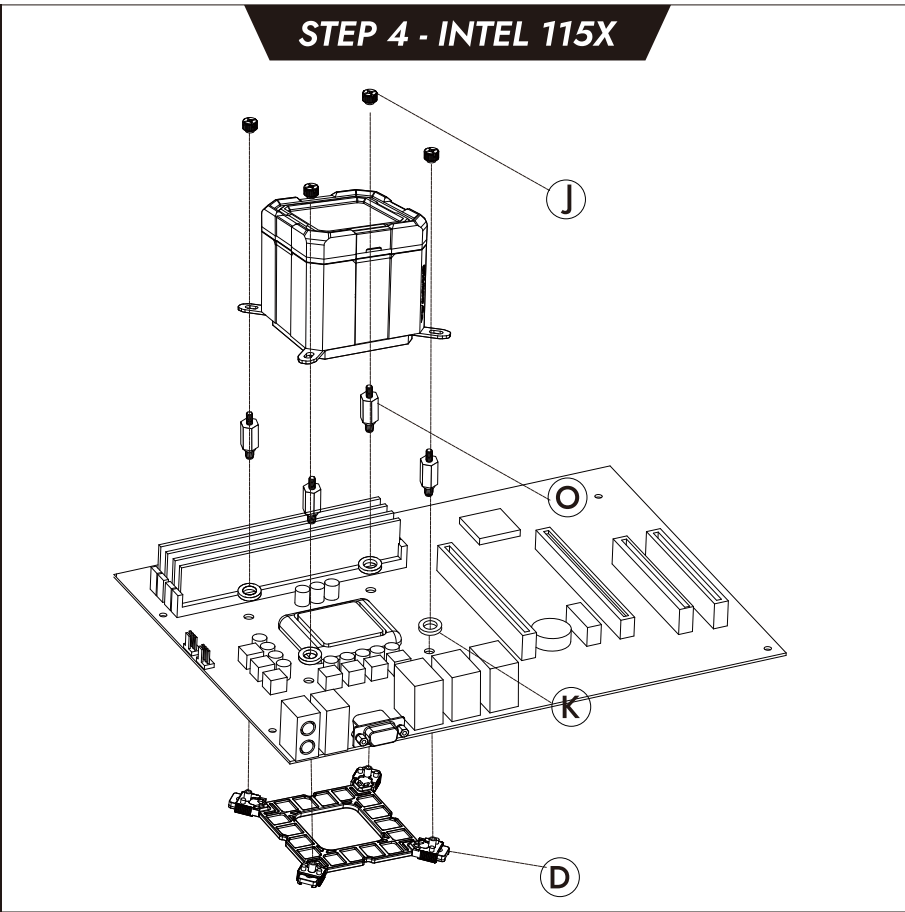


STEP 5 - INTEL 1700

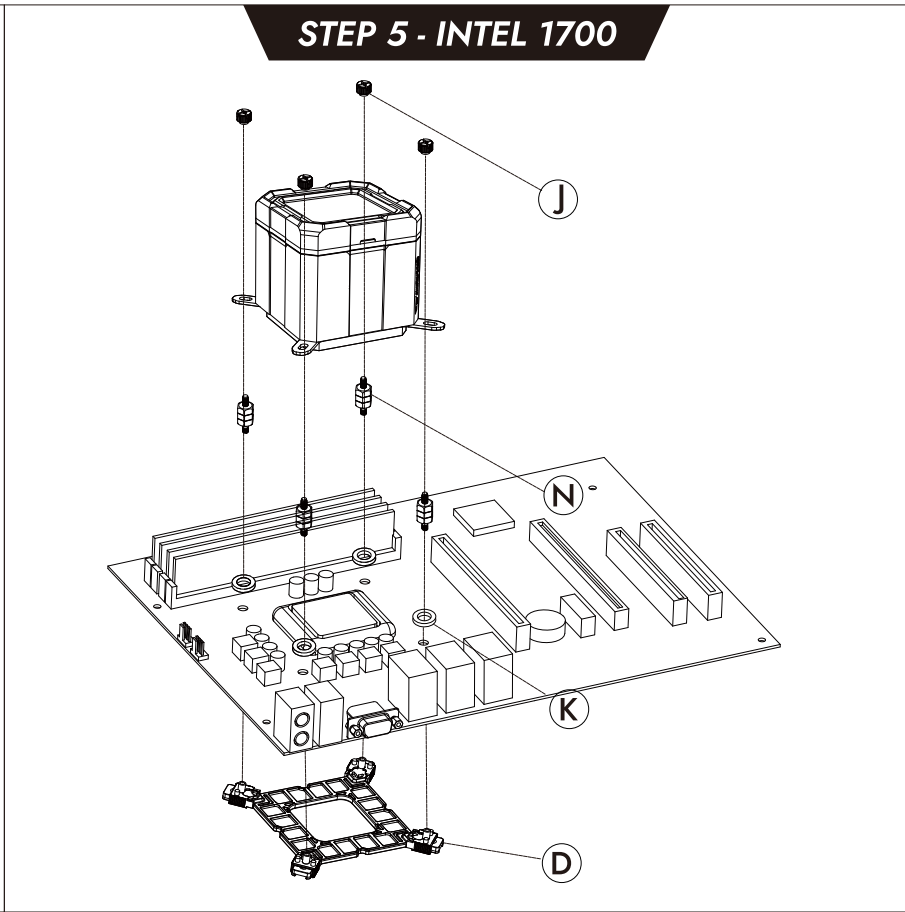

STEP 6 - AMD

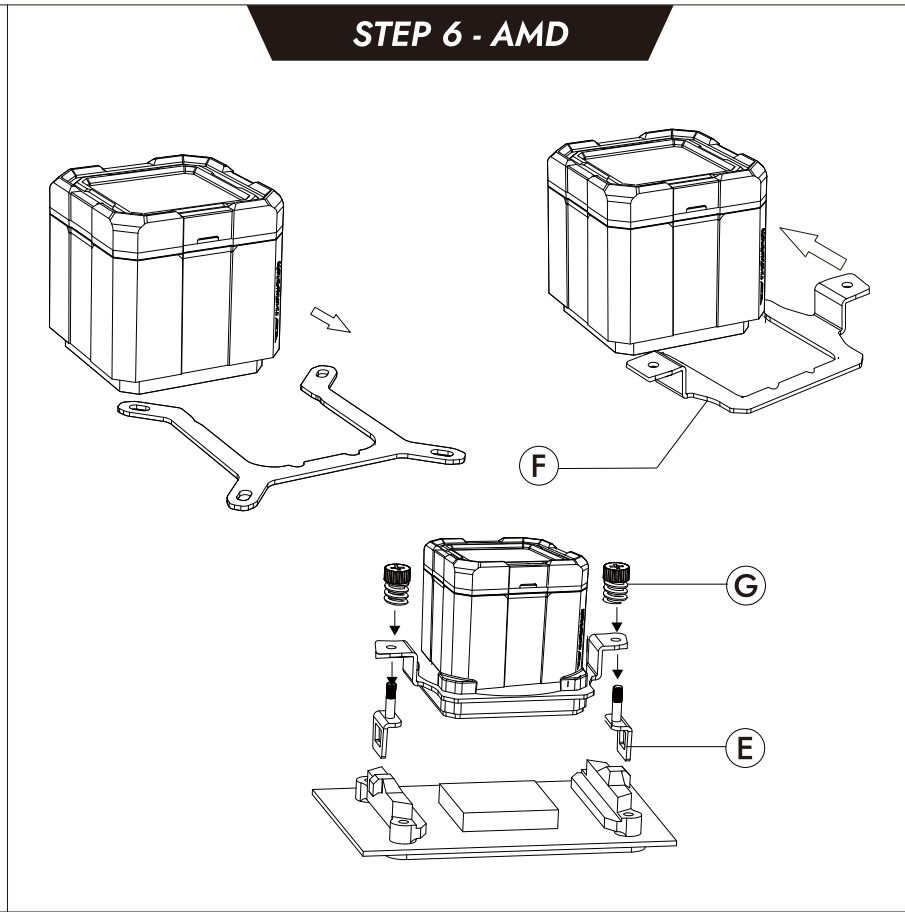

STEP 7 - Wiring

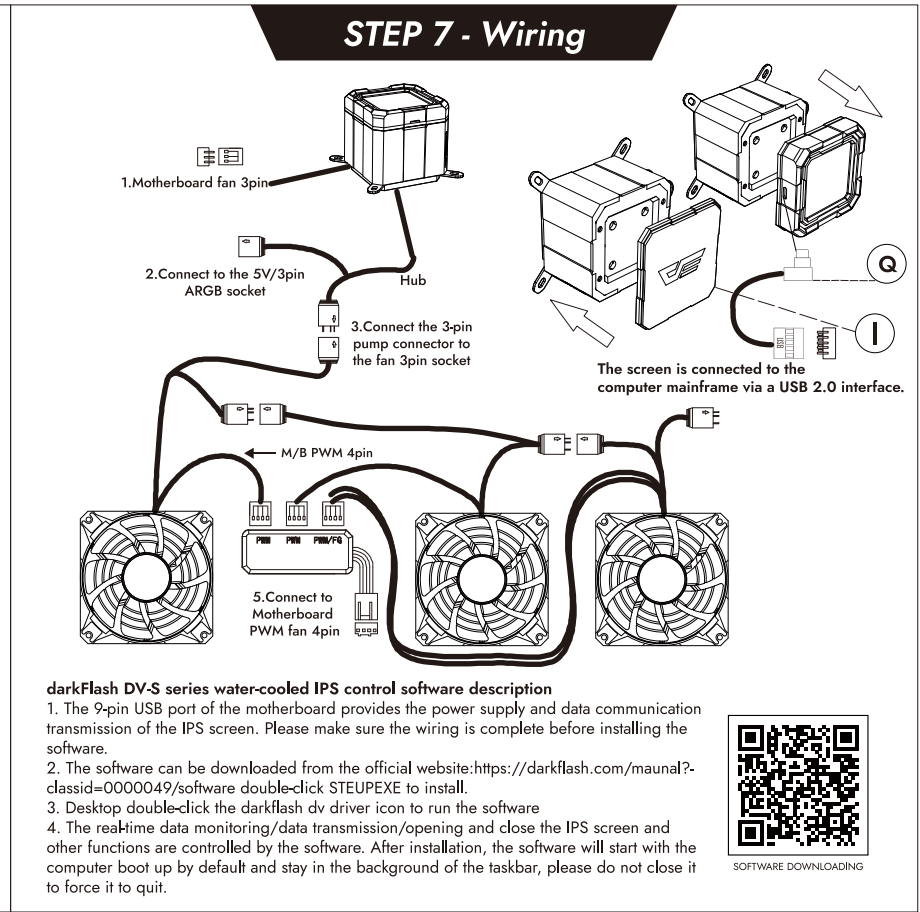

darkFlash DV-S series water-cooled IPS control software description

1. The 9-pin USB port of the motherboard provides the power supply and data communication transmission of the IPS screen. Please make sure the wiring is complete before installing the software.
2. The software can be downloaded from the official website: <https://darkflash.com/manual?classid=0000049>/software double-click STEUPEXE to install.
3. Desktop double-click the darkflash dv driver icon to run the software
4. The real-time data monitoring/data transmission/opening and close the IPS screen and other functions are controlled by the software. After installation, the software will start with the computer boot up by default and stay in the background of the taskbar, please do not close it to force it to quit.

SOFTWARE DOWNLOADING

封底