

SHELLY LightSolutions Hilux DS8 Φωτιστικό οροφής 8W (Λευκό)

Shelly · EAN 5714255011227





Machine translation from Polski. In case of doubt the manufacturer's original document prevails.

HiluX


DS8 Ceiling lamp

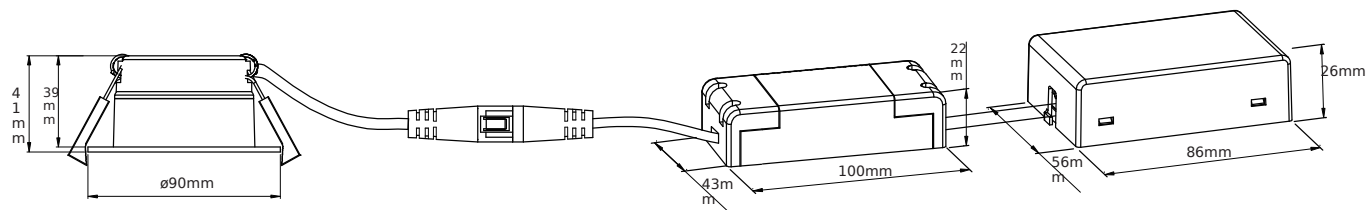

 CUT OUT: $\varnothing 68-83\text{mm}$

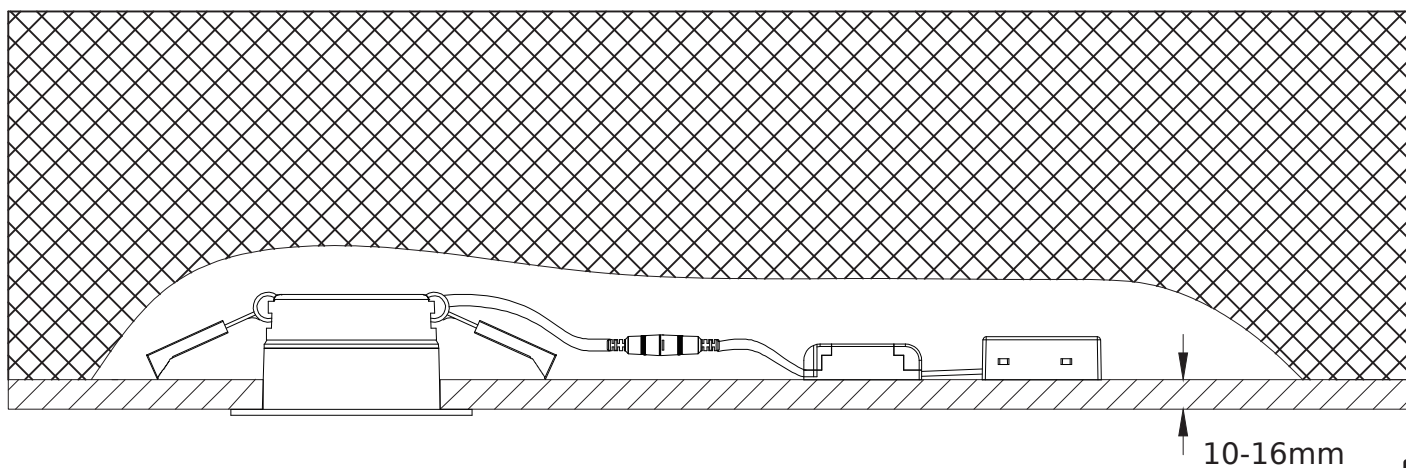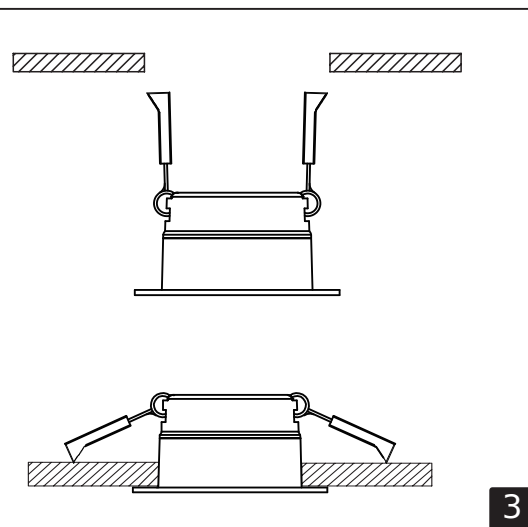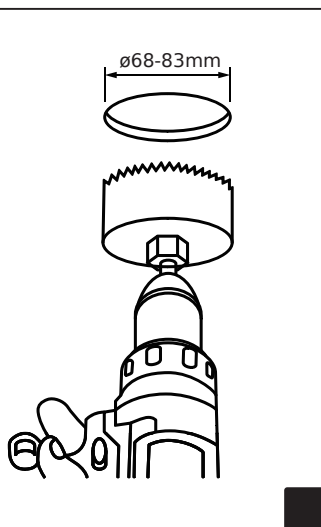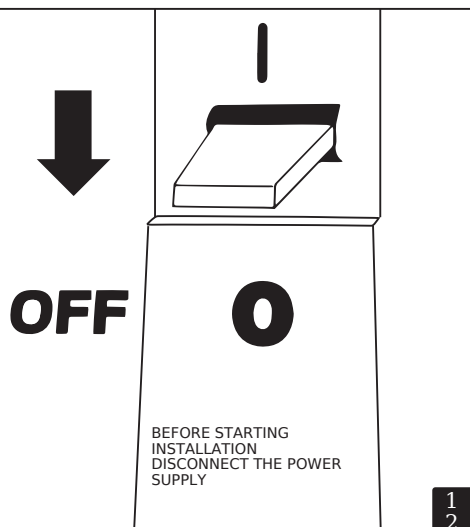

Minimum distance from flammable materials in the direction of the beam.



Installation may only be performed by a qualified electrician.

HiluX LED ApS
Michael Drewsens Vej 12, DK-8270 Højbjerg

1. Download the Shelly Smart Control app



The device can be controlled remotely using the Shelly Smart Control mobile app.

To install the app, scan the QR code below or search for "Shelly Smart Control" in the App Store, AppGallery, or Google Play. The mobile app is available for free download, and to start using it, you need to create a free account.



2. Add the device to the Shelly Smart Control app

1. Open the Shelly Smart Control app.
2. Press the "Add device" button if this is the first device you are adding.
- If you already have devices added to your account, tap the plus sign in the bottom right corner of the screen.
3. Select the "Add via Bluetooth" option.
4. Tap "Next" to continue. A list of supported devices will appear.
5. Select the device you want to add and tap "Next".
6. When prompted, enter your Wi-Fi network credentials and tap "Add device".
7. Wait for the app to finish adding the device; this may take a few minutes.
- Once the process is complete, a success message will appear.
8. Enter the device name and select its picture; tap "Next".
9. Choose the room to which the device should be added, or create a new one by tapping the "Add room" button.
10. Tap "Save". The device has been added to your account.

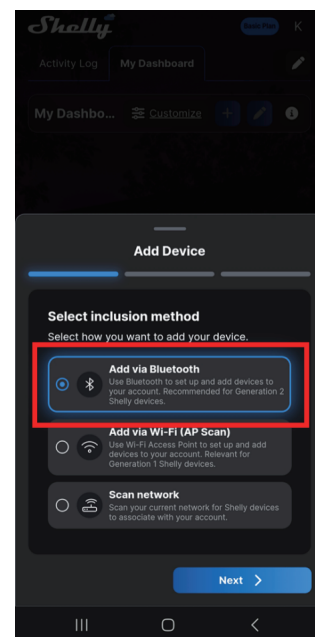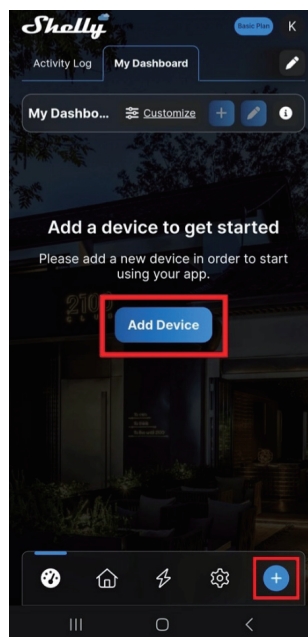

3. Easy pairing with the Shelly BLU device

1. After turning on the Hilux device, it will search for BLU remotes for 30 seconds without displaying any visible signals. The Shelly RC Button 4 or Shelly BLU wall switch must be switched to pairing mode by pressing any button 4 times. The LED will start flashing blue, and the device will enter Bluetooth pairing mode for one minute.
2. Press the button on the remote. Once the remote is detected, the Hilux device will blink twice to confirm.
3. On the remote, select the pair of buttons you want to use to control the Hilux device, and then press one of them. If the assignment is successful, the Hilux device will blink three times, signaling the end of the procedure.
4. You can now turn the Hilux device on and off using the remote, as well as adjust the brightness by holding the appropriate buttons on the remote.

4. Factory reset

To restore the Hilux device to factory settings by turning it off and on again, you need to turn off and on the device five times in a row. After successfully completing the procedure, the Hilux device will blink several times, reset all settings and configurations, and then turn on again with default settings – 4600 K at 50% brightness.

Example:

1. Turn off the Hilux device -> Turn on the Hilux device for 2-3 seconds.
2. Turn off the device -> Turn on the device for 2-3 seconds.
3. Turn off the device -> Turn on the device for 2-3 seconds.
4. Turn off the device -> Turn on the device for 2-3 seconds.
5. Turn off the device -> Turn on the device and wait.
6. The Hilux device will blink several times, reset all settings and configurations, and then turn on with factory settings.

This document is a translation of the original user manual created by the manufacturer.

Detailed information about the distributor's / manufacturer's warranty conditions is available on the website <https://serwis.innpro.pl/warranty>.

The product must be regularly maintained (cleaned) by the user or through specialized service points at the user's cost and responsibility. In the absence of information about necessary maintenance or service actions in the user manual, the user should regularly, at least once a week, assess the physical condition of the product against that of a physically new product. If any deviation is detected or noted, urgent maintenance (cleaning) or service actions should be taken. Failure to properly maintain (clean) and respond upon detecting a state of deviation may lead to permanent damage to the product. The warranty provider is not responsible for damages resulting from neglect.

Warnings and safety information

All information regarding the use of the product is contained in the user manual. Before using it, familiarize yourself with its contents and follow the instructions provided.

Before use, also review the following information:

Usage warnings

Risk of damage to the device:

- Do not expose the device to extreme temperatures, falls, impacts, strong shocks, or other factors that may contribute to its damage.
- Do not expose the device to water unless the manufacturer declares it waterproof.
- When installing LED strips, ensure that the mounting surface is clean, dry, and free of dust to avoid them falling off and getting damaged.
- Do not use devices with damaged components, such as broken bulbs, cut LED strips, or damaged mounting brackets.
- Ensure that devices are properly mounted to prevent accidental falls and damage.
-

Child hazard:

- The device is not intended for play and is not suitable for children.
- Smart lamps, bulbs, and other lighting elements may contain small parts that pose a choking hazard.
- Keep devices and accessories away from children to prevent accidental swallowing of small parts or damage to the product due to improper use.

Risk of electric shock:

- Installation of devices should only be carried out with the power supply disconnected.
- Use only original power cables, adapters, and connectors provided by the manufacturer or recommended in the user manual. Do not use devices with damaged wires, plugs, or connectors to avoid short circuits or electric shock.
- If the device is not waterproof, avoid installation in areas exposed to moisture, such as bathrooms or outdoor spaces.
- Do not handle connectors or wires with wet hands.
-

Risk of overheating and burns:

- Avoid touching lamps and bulbs while they are on or immediately after turning them off, as they may be very hot.
- Ensure that lamps and bulbs are installed in areas with adequate ventilation to prevent overheating.
- Do not cover lamps or bulbs with materials that may restrict airflow or cause ignition.

Wireless connectivity

Data protection:

- Smart lighting devices often use Wi-Fi, Bluetooth, or Zigbee. If possible, secure them with a strong password and enable connection encryption.
- Regularly update the firmware of devices and controlling applications to ensure data security and protection against unauthorized access.

Access management:

- Limit access to lighting control applications to trusted users only.
- Regularly check the list of devices connected to the network and remove those that are no longer needed or may pose a threat. If possible, use notification features for unauthorized access attempts to devices.
-

Information on proper usage

Installation and configuration:

- Before installation, ensure that all components are suitable for the chosen installation location.
- Always ensure that devices are securely mounted and connected according to the manufacturer's instructions.
- For outdoor lighting installation, ensure that the device has the appropriate IP rating and is protected against weather conditions.

Maintenance and cleaning:

- Regularly check the condition of lighting devices to ensure they are functioning properly and are not damaged.
- Clean devices with a soft, dry cloth. Avoid using water and chemicals that may damage their surface.

Safety of use:

- Do not leave lighting on unattended, especially for devices that may heat up.
- If you notice sparking, a burning smell, or other signs of improper device operation, immediately disconnect it from the power supply and contact service.

Additional precautions

Service and repairs:

- In case of any problems with the device, contact an authorized service center.

- Do not attempt to repair devices yourself to avoid further damage or loss of warranty.

Safe disposal:

- Used lighting devices must be disposed of in accordance with local regulations regarding electronic waste.
- Do not throw devices in general waste – take them to a local electronic waste collection point.

If you need additional information regarding the product, contact customer service (email: hurt@innpro.pl, website: <https://innpro.pl/>) or another specialist.

SIMPLIFIED EU DECLARATION OF CONFORMITY

Shelly Europe Ltd. hereby declares that the type of radio device Ceiling lamp SHELLY LightSolutions Hilux DS8 8W is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following website:

<https://files.innpro.pl/shelly>

Manufacturer's address: Cherni Vrah Blvd. 103 1407 Sofia, bg

Radio frequency:

Wi-Fi: 2400-2483.5 MHz

Bluetooth LE: 2400-2483.5 MHz

Maximum radio frequency power: <20dBm

Environmental Protection



Waste electrical and electronic equipment marked in accordance with European Union directives must not be placed together with other municipal waste. It is subject to selective collection and recycling at designated points. By ensuring its proper disposal, you prevent potential negative consequences for the natural environment and human health. The system for collecting used equipment complies with locally applicable environmental regulations regarding waste disposal. Detailed information on this can be obtained from the municipal office, cleaning facility, or the store where the product was purchased.



The product meets the requirements of the so-called New Approach directives of the European Union (EU) concerning safety, health protection, and environmental protection, identifying hazards that should be detected and eliminated.

Importer: **INNPRO**

INNPRO Robert Błędowski sp. z o.o.
Rudzka 65c
44-200 Rybnik, Poland
tel. +48 533 234 303
hurt@innpro.pl

www.innpro.pl

Representative in the EU:

Shelly Europe Ltd.
Cherni Vrah 103
1407 Sofia, Bulgaria
support@shelly.cloud