



M3 Pro

# Product List

Before use, please check the package carefully as per the product list. In case of missing, please contact the customer service or your agent.



USB-C Cable x 1



User Manual x 1

M3 Pro Gimbal x 1

Bluetooth Remote Controller x 1

Magnetic Fill Light x 1

# Product charging

## ■ Stabilizer charging

Use the USB-C charging cable provided in the package to connect the power adapter to the charging interface of the stabilizer phone clip.

Low battery: red light blinking

Charging: red light blinking

Fully charged: red light solid



Indicator light



# Fill light description

The phone clamp comes with a built-in magnetic strip:  
The fill light can be directly attached magnetically.



## Power button:

**Press and hold:** Power on/off

**Single click:** Switch colors (White / Warm White / Red / Blue / Green / Purple / Cyan)

**Double click:** Alternate gradient (Red / Yellow / Green / Cyan / Blue / Purple)



## Mode button:

**Single click (in single-color mode):** 3-level brightness adjustment

**Single click (in gradient mode):**

Switch gradient speed

**Double click:** Red/Blue slow flashing



## Charging indicator light:

Charging: Red light solid

Fully charged: Green light solid

## Product Specifications:

Model: PO3

Weight: 22g

Battery: 3.7V/400mAh

Charging time: Approx. 1 hour

Standby time: Approx. 2 hours

(at maximum brightness in single-color mode)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and  
(2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### FCC Radiation Exposure statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.


**EN**

# Product introduction

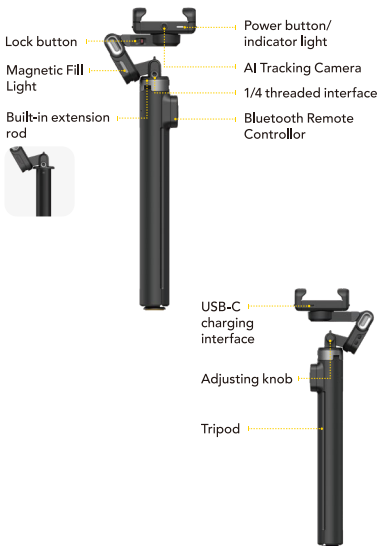


# Handheld shooting mode

- 1 Release the stabilizer's phone clamp arm by lifting upward, then rotate the clamp assembly 180° on its pivot shaft to secure in front-facing position.



- 2 Unlock the clamp button, position the phone centrally, horizontal and vertical panel can be installed. Ensure the phone's camera and AI lens face the same direction during installation.





# Handheld shooting mode

- 3 Long press the power button to turn on and use.



Hold the axis arm under the phone clip and stretch it upward to extend the built-in extension rod, and turn it back and forth to adjust the shooting angle.




# AI tracking mode

- 1 Press the base plate to automatically deploy the tripod legs.



- 2 Hold the device and pull up to extend the built-in extension rod, then place the device on the table.




# AI tracking mode

- 3 Support the phone clamp and directly insert your phone, both horizontal and vertical orientations are supported.



- 4 Unlock the locking button, then press and hold the power button to turn on the device.



# Indicator description



## ■ Handheld shooting mode

|                              |
|------------------------------|
| Blue light: Power on default |
| White light: POV mode        |



## ■ AI tracking mode

|                                                             |
|-------------------------------------------------------------|
| Blue light: Power on default                                |
| Green light solid: Locked character (gesture function on)   |
| Yellow light solid: Locked character (gesture function off) |
| Green light/Yellow light blinking: Unlocked character       |

# Gesture Introduction

(AI tracking mode)



OK: Turn on tracking



Palm: Turn off tracking



Both hands L: Turn on/off gesture control

# Power button description


You can use the power button to accomplish quick operations. The power button will have different functions in different modes.



## 1 Gimbal power button

|                                         |                                                           |
|-----------------------------------------|-----------------------------------------------------------|
| Handheld shooting mode/AI tracking mode | Long press: Power on/off                                  |
| Handheld shooting mode                  | Single click: Switch to horizontal / vertical orientation |
| AI tracking mode                        | Single click: Turn on/off AI tracking                     |

# Remote controller description

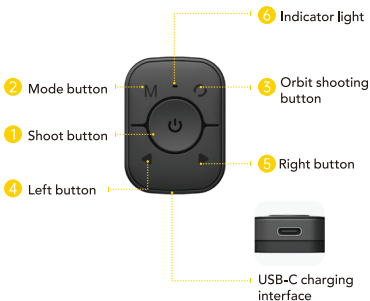

## 1 Shoot button

|                                               |                                                                                          |
|-----------------------------------------------|------------------------------------------------------------------------------------------|
| Handheld dolly shot mode/<br>AI tracking mode | Long press: Power on/off<br>Single click: Camera / video                                 |
| AI tracking mode                              | Double click: Turn on/off AI<br>tracking<br>Triple click: Turn on/off gesture<br>control |

# Remote controller description

## 2 Mode button

|                          |                                                           |
|--------------------------|-----------------------------------------------------------|
| Handheld dolly shot mode | Single click: Switch to horizontal / vertical orientation |
|                          | Double click: Center the phone/exit POV/exit rotation     |
|                          | Triple click: POV mode                                    |

## 3 Orbit shooting button

|                                               |                                                       |
|-----------------------------------------------|-------------------------------------------------------|
| Handheld dolly shot mode/<br>AI tracking mode | Single click: 200° automatic rotation                 |
|                                               | Double click: 200° forward and reverse rotation twice |
|                                               | Triple click: 360° rotation                           |
|                                               | Hold 3 seconds: 360° spin                             |

## 4 Left button

|                                               |                                     |
|-----------------------------------------------|-------------------------------------|
| Handheld dolly shot mode/<br>AI tracking mode | Long press: Adjust angle(turn left) |
|-----------------------------------------------|-------------------------------------|

# Remote controller description

## 5 Right button

|                                               |                                       |
|-----------------------------------------------|---------------------------------------|
| Handheld dolly shot mode/<br>AI tracking mode | Long press: Adjust angle (turn right) |
|-----------------------------------------------|---------------------------------------|

## 6 Indicator light description

|                                     |                                                                        |
|-------------------------------------|------------------------------------------------------------------------|
| Power on (Bluetooth not connected): | Blue light flashing                                                    |
| Power on (Bluetooth connected):     | Blue light flashes once per button press to indicate command reception |
| Fully charged (when powered off):   | Green light solid                                                      |
| Charging (when powered off):        | Red light solid                                                        |
| Low battery:                        | Blue light flashes rapidly 3 times then turns off                      |

Note:

\*When using the remote control's left/right buttons to control the device, please turn off the AI tracking function (power button should be blue).

\*Before using other function modes, make sure to exit POV mode (power button should be blue).

\*If the remote control is powered on but not connected to Bluetooth and no buttons are pressed, it will automatically shut down after 10 minutes to save power.

\*If the remote control is powered on and connected to Bluetooth but no buttons are pressed, it will automatically shut down after 20 minutes to save power.



# Product Parameters

|                        |                                                  |
|------------------------|--------------------------------------------------|
| Product Size           | 82*86*325MM                                      |
| Folded size            | 82*73*456MM                                      |
| Total handheld length  | 177CM                                            |
| Total height           | 180CM (Including phone height)                   |
| Product weight         | 530g                                             |
| Product material       | PC+ABS                                           |
| Max payload            | 300g                                             |
| Battery capacity       | 1000mAh                                          |
| Power input            | DC5V 400mA                                       |
| Charging time          | Approximately 3 hours                            |
| Working hours          | Handheld shooting mode:<br>approximately 7 hours |
|                        | AI tracking mode:<br>approximately 4 hours       |
| Mechanical limit Angle | Phone clamp 360° unlimited rotation              |

# Product Parameters

|                                         |                |
|-----------------------------------------|----------------|
| Remote controller battery specification | 3.7V/40mA      |
| Remote control charging input           | DC5V 20mA      |
| Remote control charging time            | 2H             |
| Remote controller working hours         | 30 days        |
| Remote control distance                 | 10 meters      |
| Tracking distance                       | within 5 meter |

\*Remote controller working hours is related to the frequency of use, and the data is calculated according to the use of 10 minutes a day.

\*The above data are laboratory test data. Under different test conditions, the data will have different degrees of error. Please refer to the actual machine experience.