B0590TH-V6 英文说明书
折后-95X145MM（THREM版）

V1

Scan the QR code for more help

or **Email:** support@baldronline.com

BaldrTherm™

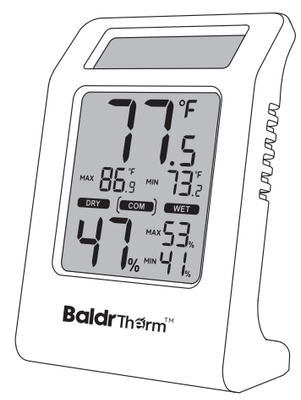

USER MANUAL

SOLAR THERMO -HYGROMETER

MODEL NO. B0590TH-V6

Thank you for your purchase, please read the manual and save it for future reference.

Email: support@baldronline.com

PRODUCT OVERVIEW

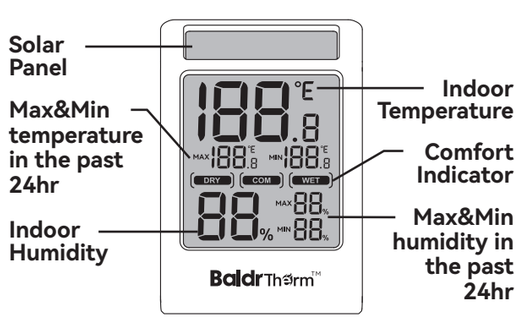

DRY	COM	WET
Humidity **< 30%**	**30% ≤** Humidity **≤ 70%** **68°F ≤** Temperature **< 79°F**	Humidity **> 70%**

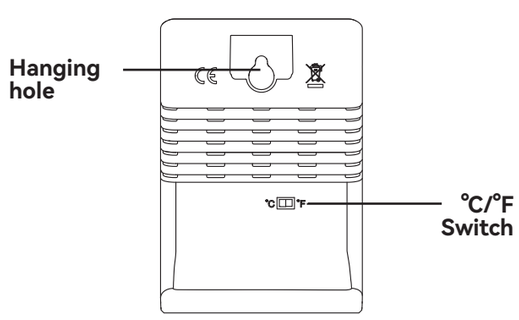

SPECIFICATION

- **Temperature Range:** 14~122°F (-9.9~50°C)
- **Temperature Accuracy:** ±1.8°F (±1°C)
- **Humidity Range:** 1~99%
- **Humidity Accuracy:** ±3% in range of 40~70%, ±5% in other range
- **Source of power:** Solar or 1*AAA built-in alkaline battery

HOW TO USE

- Please place the product under sunlight or indoor lighting to active the solar-powered supply and drive the display.
  For use in low level of light, please remove the insulation tape, we have a build-in alkaline battery for standby power supply at night.



Note: The product will automatically switch to solar power mode when the surrounding light become bright enough even if the insulation tape has been removed. The battery lifetime can achieve more than 3 years. If the battery needs to be replaced in the future, you can use tools to pry open the housing from here.

WARRANTY

- **BaldrTherm** provides a 1-year limited warranty on this product against manufacturing defects in materials and workmanship. You can get an extra of 2-years of extended warranty by registering your product on our website **www.baldronline.com**

MADE IN CHINA