尺寸：70x105mm

MANUAL
BICYCLE TAILLIGHTS

Contents

WARNING 1
BL09 BL11 2
BL10 3
BL12 4
BTL01 5
BTL02 6

WARNING:

Dear valued customer, thank you very much for purchasing this product! Please Properly read and understand this manual before using this product.

1. Some bicycle taillights use Built-in Lithium polymer batteries for power supply.
2. The product is equipped with indicator lights. When charging, the indicator light is red, and when fully charged, the indicator light will go out.

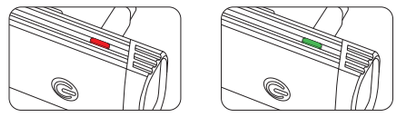

• Charging • Full Charged

1.1 USB charging instruction chart

3.Do not shine directly in eyes.Powerful LED light can damage eyesite immediately.
4.Only use provided battery charger for charging.
5.If the battery isn't used for a very long time, please recharge and discharge it every 3 months to keep the battery in good condition.
6.It's normal that the headlight will get a little hot when it is used for a long time.
7.Please recharge the battery as soon as possible when indicator light shows low power.
8.Please keep the battery away from water, moisture and drop etc.
9.To avoid any damage to headlamp's surface, please don't constantly expose headlamp to sunlight, water, chemicals, corrosive gases or any other oxidizing environments.
10.All product parameters provided in this manual are our laboratory data, for reference only, and there is no actual way to use it.
11.As our series of products will be continuously upgraded, this manual can still be applied to the subsequent series of products.

INSTRUCTION FOR BL09/BL11 series

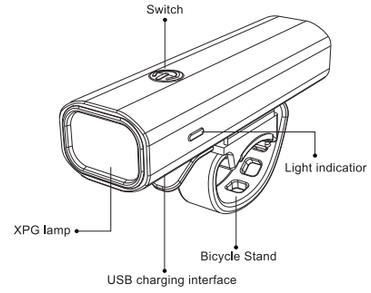

INSTRUCTIONS

1.BL09 has 4 light modes,single press the center button to turn on the strong light mode, continue to press the button adjustment (strong light-low light-off) mode sequence cycle. Long press for about 2 's to turn on SOS, and continue to press to adjust the mode (SOS-Strobe-off).
2.Unscrew the bicycle frame lock switch, pull out the connection with and the bicycle frame is pressed on the handle of the bicycle.the bicycle handle with cohesion,inserted into the bicycle frame lock socket.

PRODUCT PARAMETERS

Items	Power	BatteryType (Battery Capacity)	Charging way	Light Modes
BL09	5W	18650 Built-in Li-ion battery(1200mAh)	USB	4 modes (Strong-Low-SOS-Strobe)
BL11	5W	18650 Built-in Li-ion battery(2000mAh)	USB	4 modes (Strong-Low-SOS-Strobe)

INSTRUCTION FOR BL10 series

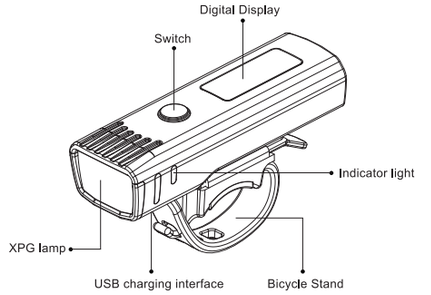

INSTRUCTIONS

1.Turning on the light, short press the On/Off button to turn on the light. Adjusting brightness level.
1;When the light is just turned on, it will be in the brightness level.
1;Press the On/Off button again to adjust to the brightness level.
2; press the button one more time to reach the brightness level.
3. Adjusting flashing modes 1;Press the ON / OFF button once and the lamp will enter slow flashing mode.
1. Press again to adjust to the quick flashing mode.
2. Turning off the light Long press the on/Off button to turn off the light.

PRODUCT PARAMETERS

Items	Power	BatteryType (Battery Capacity)	Charging way	Light Modes
BL10	5W	18650 Built-in Li-ion battery(1500mAh)	USB	Light Sensing-Strong Light-Low Light-Strobe

INSTRUCTION FOR BL12 series

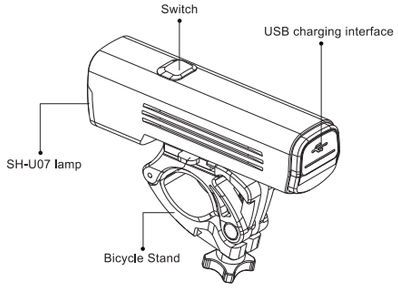

INSTRUCTIONS

Mode 1: press the switch strong (low) - weak (low) - flashing (nearLight)
Mode 2: double click the switch strong light (high beam) - double click the switch (close)
Mode 3:
- double click the switch strong light (high beam)
- press the switch (high beam strong light + near light Strong light)
- press the switch (high beam weak light + low beam weak light)
- press the switch once (high beam Flash + low beam flash)
- long press switch (power off)

PRODUCT PARAMETERS

Items	Power	BatteryType (Battery Capacity)	Charging way	Light Modes
BL12	10W*2	21700 Built-in Li-ion battery(4800mAh)	Tycp-C	Please refer to the instructions above

INSTRUCTION FOR BTL01 series

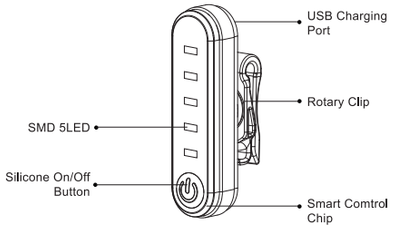

INSTRUCTIONS

1.The BTL01 have 4 light modes: Red 5 LED is ON - Horse race lamp - Red 5 LED flash - horse race lamp cycle on.
2.The BTL01 can be installed on the bicycle taillight, making outdoor riding safer.
Mounting method on bicycle (As Figure 1.3):
1. Press the bicycle holder switch and insert the connection.
2.The bicycle frame is pressed on the bicycle pipe rack.(for15-35mm).
3. Fix it to the bicycle and insert the bicycle frame lock seat.



PRODUCT PARAMETERS

Items	Power	BatteryType (Battery Capacity)	Charging way	Light Modes
BTL01	1W	Built-in Li-ion polymer battery(230mAh)	USB	Full Brightness-Slow Flashing-Fast Flashing-Half Brightness

INSTRUCTION FOR BTL02 series

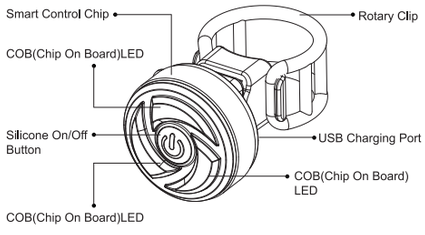

INSTRUCTIONS

1. Turning on the light Short press the On/Off button to turn on the light.
2 . When the light is just turned on, it will be in the brightness level 1.
Press the On/Off button again to adjust to the brightness level
2; press the button one more time to reach the brightness level 3.Adjusting flashing modes
3.Press the ON / OFF button once and the lamp will enter slow flashing mode 1.
Press again to adjust to the quick flashing mode 2.
4.Long press the on/Off button to turn off the light.



PRODUCT PARAMETERS

Items	Power	BatteryType (Battery Capacity)	Charging way	Light Modes
BTL02	3W	Built-in Li-ion battery (330mAh)	USB	Slow Flashing-Fast flashing -Always Lighting Mode

APPLICATION SCENARIO

Warranty card

User name: _____

Phone number: _____

E-mail: _____

Address: _____

Other Contacts: _____

Release Date: _____