
Yeelight Κρεμαστό Φωτιστικό Οροφής Crystal Pendant Light (Λευκό)

YEELIGHT · EAN 6924922226765


Machine translation from Polski. In case of doubt the manufacturer's original document prevails.



Yeelight Crystal Light

User Manual

PRODUCT DESCRIPTION

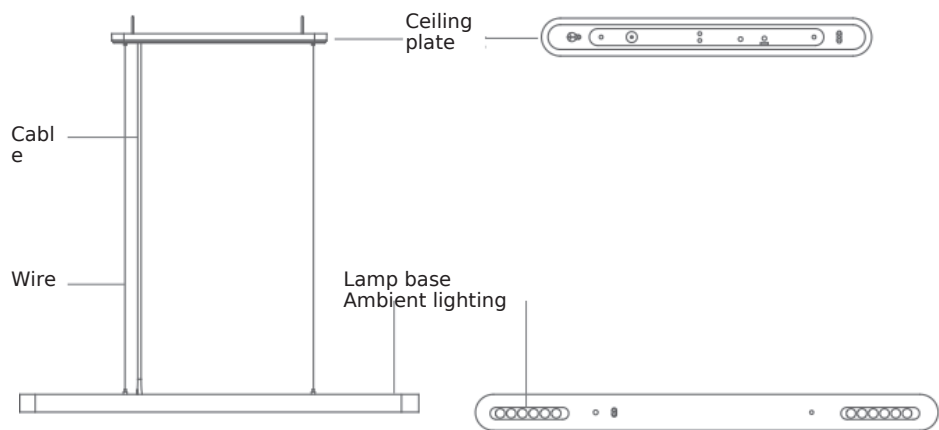

 × 2
Expansion plugs
Self-tapping screws


 × 2

 × 2
Wires

INSTALLATION INSTRUCTIONS


I. Drilling holes

1. Remove the lamp and all accessories from the packaging.
2. Choose an appropriate location where the lamp will be installed.
3. Drill holes $\varnothing 8\text{mm}$ with an electric drill (Depth $L \geq 40\text{mm}$) and insert the expansion plugs.



II. Attaching the back plate



1. Screw the self-tapping screw into the expansion plug; Do not tighten yet, leave a 3-5mm gap.
2. Pass the cable through the silicone hole and adjust the length.
3. Insert the self-tapping screw into the hole and tighten it to the narrower part of the hole.
4. Screw in the second screw into the second hole and securely press the entire plate.

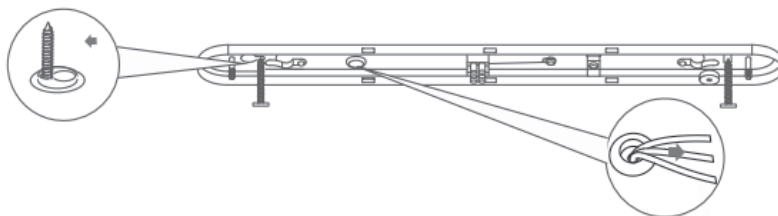

* Ensure that the plate is securely mounted and there is no risk of falling.

III. Wiring

1. Remove 6-8mm of the cable cover.
2. Connect the three wires as shown in the diagram, then tighten the screws to them.

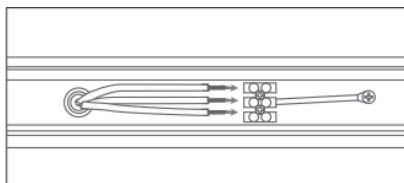


* Remember to ground



* Disconnect the power before starting this process!


IV. Mounting the ceiling lamp

1. Adjust the cable length to the height of the wires (excess cable can be hidden in the lamp).
2. Place and press the cover of the back plate.
3. Screw in two screws with wires to the cover.

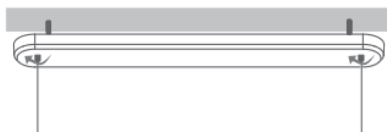

V. Mounting the lamp base


1. Connect both wires to the lamp base and adjust their length.
2. Insert both cables into the ring.

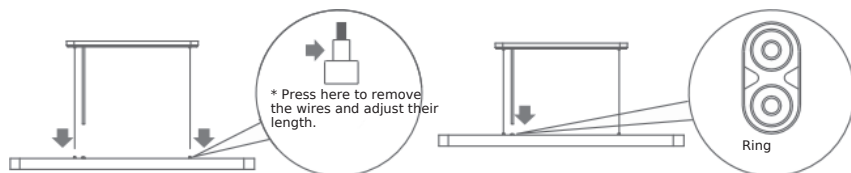

SMART CONTROL

1. Download the Yeelight app on your mobile device.
2. Turn on the light, then the app, and connect the lamp to the app by following the on-screen instructions.

* Ensure that the Wi-Fi network is enabled and there is internet access.
* The lamp also works with the Yeelight remote.

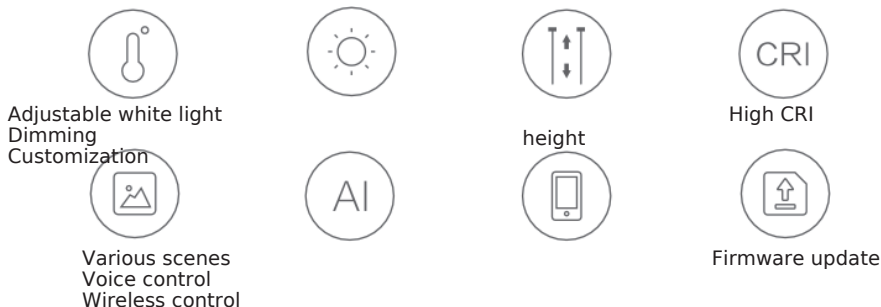

RESTART

Turn the lamp on and off using the switch 5 times (wait 2 seconds after each on and off). The light will start to pulse and the lamp will restart after 5 seconds.

*If the lamp needs to be connected to a new network, it must be restarted before use.

WARNINGS

1. Check the voltage before using the product. Incorrect voltage may damage the product and create a hazard.
2. The lamp is non-replaceable.
3. The lamp generates heat during operation. Ensure adequate ventilation in the area where the lamp operates.
4. The power supply is not interrupted if the lamp is turned off using the app or remote. In such cases, do not touch or disassemble the lamp, as there is a risk of electric shock.
5. The ceiling lamp should not be installed in a location where the light will be within 38cm of eye level.



The power supply must be disconnected before installation and the instructions must be strictly followed.



Assistance from electricians should be sought for installation and maintenance. Wiring should comply with IEEE standards or local regulations.

SPECIFICATIONS

Name: Yeelight Crystal LED Lamp
Power indicator: 0.9
Color temperature: 2700-6000K
Device temperature: -10°~40°C
Device humidity: 0%-85%RH

Model: YLDL01YL
Input power: 220V~50/60Hz 0.16A
Rated power: 33W (280x0.093W+14x0.5W/LED)
Compatibility: Android 4.4, iOS 9.0 and newer versions
Wireless connectivity: Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Bluetooth 4.2 BLE

Simplified declaration of conformity

Manufacturer: Qingdao Yeelink Information Technology Co., Ltd
Address: 10F-B4, Building B, International Innovation Park, 1 KeYuanWeiYi Road,
Laoshan, Qingdao, Shandong Province, People's Republic of China
Product: Yeelight Crystal Pendant Light
Model: YLDL01YL
Radio frequency: Wi-Fi: 2412-2472MHz, Bluetooth: 2402-2480MHz
Max. radio frequency power: Wi-Fi: 15.7dBm, Bluetooth: 5.7dBm

The product complies with the European Parliament and Council Directive 2014/53/EU of

April 16, 2014, on the harmonization of the laws of the member states relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC.

The declaration of conformity is available at the website:

<https://files.innpro.pl/Yeelight>

Środki ostrożności

1. Przed przystąpieniem do ładowania sprawdź, czy styki urządzenia są czyste.
2. Nigdy nie pozostawiaj urządzenia podczas użytkowania i ładowania bez nadzoru.
3. Zadbaj o to, aby w sytuacji awaryjnej móc szybko odłączyć urządzenie od źródła zasilania.
4. Nigdy nie wystawiaj urządzenia na działanie wysokiej temperatury.
5. Ładuj urządzenie w miejscu suchym i dobrze wentylowanym z dala od materiałów łatwopalnych, zachowaj wolną przestrzeń min. 1m od innych obiektów.
6. Nigdy nie zakrywaj urządzenia podczas ładowania.
7. Nigdy nie używaj zasilacza, stacji ładowania, kabli itp. bez rekomendacji i atestu producenta.
8. Zadbaj o swoje mienie, urządzenie wyposażone jest w ogniwa, które są trudne do ugaszenia, wyposaż się w płachtę gaśniczą.

Ochrona środowiska



Zużyty sprzęt elektroniczny oznakowany zgodnie z dyrektywą Unii Europejskiej, nie może być umieszczany łącznie z innymi odpadami komunalnymi. Podlega on selektywnej zbiórce i recyklingowi w wyznaczonych punktach. Zapewniając jego prawidłowe usuwanie, zapobiegasz potencjalnym, negatywnym konsekwencjom dla środowiska naturalnego i zdrowia ludzkiego. System zbierania zużytego sprzętu zgodny jest z lokalnie obowiązującymi przepisami ochrony środowiska dotyczącymi usuwania odpadów. Szczegółowe informacje na ten temat można uzyskać w urzędzie miejskim, zakładzie oczyszczania lub sklepie, w którym produkt został zakupiony.



Produkt spełnia wymagania dyrektyw tzw. Nowego Podejścia Unii Europejskiej (UE), dotyczących zagadnień związanych z bezpieczeństwem użytkowania, ochroną zdrowia i ochroną środowiska, określających zagrożenia, które powinny zostać wykryte i wyeliminowane.

This document is a translation of the original user manual, created by the manufacturer.

The product should be regularly maintained (cleaned) by the user or through specialized service points at the user's cost and responsibility. In the absence of information about necessary periodic or service maintenance actions in the user manual, the user should regularly, at least once a week, assess the physical condition of the product against that of a physically new product. If any discrepancies are detected or identified, urgent maintenance (cleaning) or service actions should be taken. Failure to properly maintain (clean) and respond upon detecting a state of discrepancy may lead to permanent damage to the product. The warranty does not cover damages resulting from neglect.

Szczegółowe informacje o warunkach gwarancji dystrybutora /
producenta dostępne na stronie internetowej
<https://serwis.innpro.pl/gwarancja>

LI-ION Battery

The device is equipped with a LI ION (lithium-ion) battery, which, due to its physical and chemical structure, ages over time and with use. The manufacturer specifies the maximum operating time of the device under laboratory conditions, where optimal working conditions for the device exist, and the battery itself is new and fully charged. Actual operating time may differ from that declared in the offer and this is not a defect of the device but a feature of the product. To maintain maximum battery life, it is not recommended to discharge it below 3.18V or 15% of total capacity. Lower values, such as 2.5V for the cell, permanently damage it and this is not covered by the warranty. If the battery or the entire device is not used for more than one month, the battery should be charged to 50% and checked periodically every two months for its charge level. Store the battery and device in a dry place, away from sunlight and negative temperatures.

LIPO Battery

The device is equipped with a LI PO (lithium-polymer) battery, which, due to its physical and chemical structure, ages over time and with use. The manufacturer specifies the maximum operating time of the device under laboratory conditions, where optimal working conditions for the device exist, and the battery itself is new and fully charged. Actual operating time may differ from that declared in the offer and this is not a defect of the device but a feature of the product. To maintain maximum battery life, it is not recommended to discharge it below 3.5V or 5% of total capacity. Lower values, such as 3.2V for the cell, permanently damage it and this is not covered by the warranty. If the battery or the entire device is not used for more than one month, the battery should be charged to 50% and checked periodically every two months for its charge level. Store the battery and device in a dry place, away from sunlight and negative temperatures.