
Blitzwolf Ηχείο Bluetooth BW-WA4 30W 4000mAh (Μαύρο)

BLITZWOLF · EAN 5907489608206

Machine translation from Polski. In case of doubt the manufacturer's original document prevails.




USER MANUAL

BLUETOOTH SPEAKER

BW-WA4

Product description

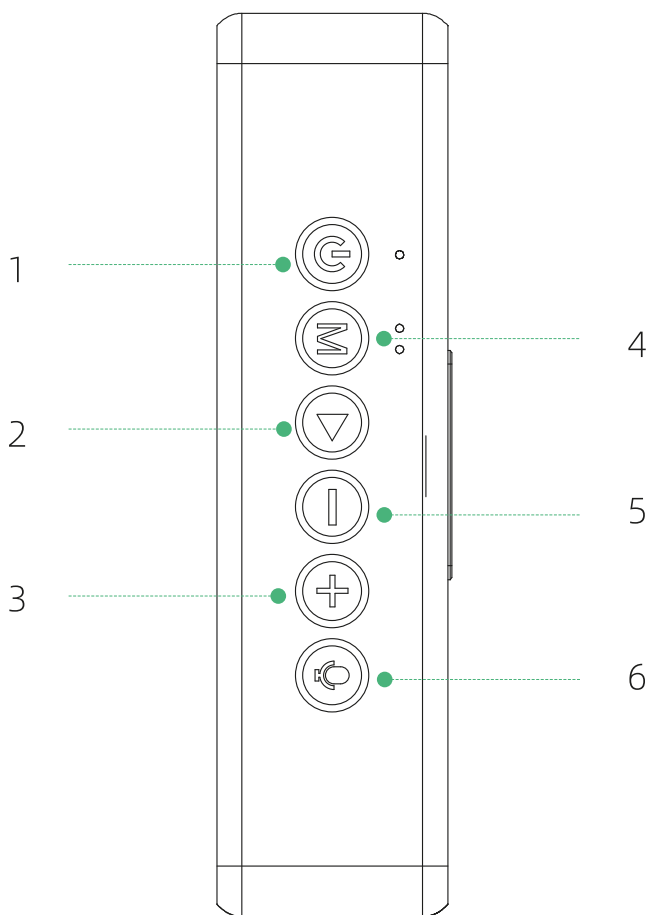

1. Power button

2. Play/Pause

3. Volume +

4. Mode change button

5. Volume -

6. Voice assistant

User manual

	Action Function	
	Short press	Power on
	Long press	Power off
	Double click	Select TWS mode
M ▶	Short press	Switching sound surround/bass/vocal
	Long press	Switching mode Bluetooth/TF card/AUX Restore factory settings within 8 seconds
	Short press	1. Play/pause 2. Answer/hang up the phone 3. Double click the last dialed phone number to redial
	Long press	1. Press and hold for 3s to disconnect Bluetooth. 2. Press and hold for 2 seconds to reject an incoming call
	Short press	Decrease volume
	Long press	Previous track
	Short press	Increase volume
	Long press	Next track
	Short press	Activate voice assistant

TWS function

1. Ensure that the two speakers to be paired are disconnected from the Bluetooth device and then turn them on.
2. Select one of the speakers. Double click the "power" button to enter TWS status.
3. After successfully pairing both speakers, the LED of one of them will light up yellow, while the other speaker will blink blue.
4. Find BW-WA4 on your device, select it, and connect.
5. If the speakers are successfully paired the first time, there will be no need to perform this action next time (the speakers will pair automatically).
6. If the speaker was previously paired, press the "M" button for 8 seconds to cut off the power. Then restart the speaker and pair it with the new speaker (see points 1-4).
7. If the speakers are paired, only the main speaker will have the "answer phone" function.
8. EQ sound effects (M button) can be used in TWS mode.

Technical specifications:

Model	V5.0
Supported profiles A2DP.AVRCP.HFP	
Communication distance	≥10m
Frequency response	80Hz-18000Hz
Impedance	4Ω±15%
Talk time	20 g (70% volume)
Music playback time	6 g (50% volume)
Battery capacity	3600mAh
Charging time	approximately 3 g
Input voltage	5V/1.5A
Maximum power	30W
Size	215x55x68mm

Simplified declaration of conformity

Manufacturer: Shenzhen Regebake Technology Co., Ltd.

Address: Room 1110-1112, 1st Floor, Building 1, Li Kewang Technology
Mass

Entrepreneurship Base, No.35 Guanlan Avenue, Longhua District, Shenzhen
City, China

Product: BLUETOOTH SPEAKER

Model: BW-WA4

Radio frequency: 2402-2480MHZ

Maximum radio frequency power: 5dBm

The product complies with the directive of the European Parliament and Council
2014/53/EU of

April 16, 2014, on the harmonization of the laws of the member states regarding the
making available on the market of radio equipment and repealing directive
1999/5/EC.

Declaration of conformity available at the website:

<https://files.innpro.pl/Blitzwolf>

Environmental protection



Waste electrical and electronic equipment marked in accordance with the European Union directive must not be placed together with other municipal waste. It is subject to selective collection and recycling at designated points. By ensuring its proper disposal, you prevent potential negative consequences for the natural environment and human health. The waste collection system complies with locally applicable environmental protection regulations regarding waste disposal. Detailed information on this topic can be obtained from the municipal office, waste management facility, or the store where the product was purchased.



The product meets the requirements of the so-called New Approach directives of the European Union (EU) regarding issues related to safety, health protection, and environmental protection, specifying hazards that should be detected and eliminated.

This document is a translation of the original user manual created by the manufacturer.

Detailed information on the distributor/manufacturer warranty conditions is available at the website <https://serwis.innpro.pl/gwarancja>

The product should be regularly maintained (cleaned) by the user or through specialized service points at the user's cost and responsibility. In the absence of information about necessary maintenance or service actions in the user manual, the user should regularly, at least once a week, assess the physical condition of the product against a physically new product. If any deviation is detected or noted, urgent maintenance (cleaning) or service steps should be taken. Failure to properly maintain (clean) and respond upon detecting a state of deviation may lead to permanent damage to the product. The warranty does not cover damages resulting from neglect.

Importer: **INNPRO**

INNPRO Robert Błędowski sp. z o.o.
ul. Rudzka 65c
44-200 Rybnik, Poland
tel. +48 533 234 303
hurt@innpro.pl
www.innpro.pl

Manufacturer:

EWORLDHOME LIMITED

Room 1505, 15/F., Hing Yip Commercial
Centre, 272-284 Des Voeux Road Central,
Hong Kong, China
Tel: (86) 20 36789654, 15626254811

Safety precautions

Before starting to charge, check if the device contacts are clean.

Never leave the device unattended while in use and charging.

Ensure that you can quickly disconnect the device from the power source in an emergency.

Never expose the device to high temperatures.

Charge the device in a dry and well-ventilated place away from flammable materials, keeping a minimum distance of 1m from other objects.

Never cover the device while charging.

Never use a power supply, charging station, cables, etc., without the manufacturer's recommendation and certification.

Take care of your property; the device is equipped with cells that are difficult to extinguish, equip yourself with a fire blanket.

LI-ION Battery

The device is equipped with a LI ION (lithium-ion) battery, which due to its physical and chemical structure ages over time and with use.

The manufacturer specifies the maximum operating time of the device under laboratory conditions, where optimal operating conditions for the device exist, and the battery itself is new and fully charged. Actual operating time may differ from that declared in the offer and this is not a defect of the device but a feature of the product. To maintain maximum battery life, it is not recommended to discharge it below 3.18V or 15% of total capacity. Lower values, such as 2.5V for the cell, permanently damage it and this is not covered by warranty. If the battery or the entire device is not used for more than one month, the battery should be charged to 50% and the charge level should be checked periodically every two months. Store the battery and device in a dry place, away from sunlight and negative temperatures.

LI-PO Battery

The device is equipped with a LI PO (lithium-polymer) battery, which due to its physical and chemical structure ages over time and with use. The manufacturer specifies the maximum operating time of the device under laboratory conditions, where optimal operating conditions for the device exist, and the battery itself is new and fully charged. Actual operating time may differ from that declared in the offer and this is not a defect of the device but a feature of the product. To maintain maximum battery life, it is not recommended to discharge it below 3.5V or 5% of total capacity. Lower values, such as 3.2V for the cell, permanently damage it and this is not covered by warranty. If the battery or the entire device is not used for more than one month, the battery should be charged to 50% and the charge level should be checked periodically every two months. Store the battery and device in a dry place, away from sunlight and negative temperatures.

Product battery specifications

Feature	Value
Product code	BW-WA4 Speaker
EAN code	5907489608206
Battery category	Portable battery
Battery type	Portable lithium batteries (other than button cells)
Net weight (kg)	0.0898
Capacity (mAh)	3600