



ONIKUMA
GAMING

GT839




Professional Gaming Headset

USER MANUAL

Line mode (optional)

Insert the Type-c cable with audio to enter Line mode and work directly. If the headset is in Wireless mode, insert the Type-c cable with audio and the headset Wireless will automatically shut down and enter Line working mode.

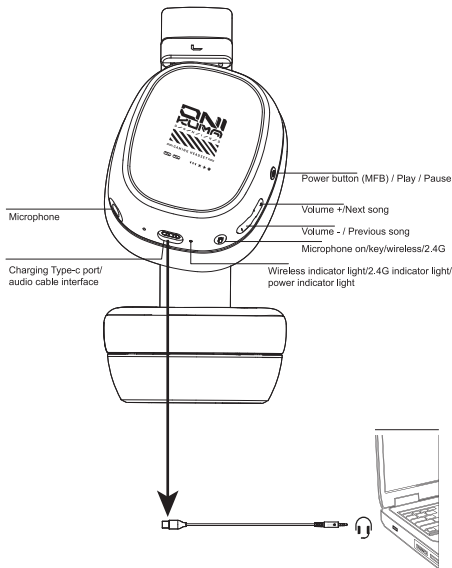

Product Specifications

Wireless version	V5.4
Working Distance	15m
Working Hours	≈45H
Charging Time	≈2H
Battery capacity	800mAh
Product Dimension	195X85X197mm

Function Control


Power on	Long press the power button for 3 seconds
Power Off	In any state, long press the power button for 5S
Volume +	Short press "+"
Volume -	Short press "-"
Previous song	Long press the "-" key
Next song	Press and hold the "+" key
Play/Pause	Short press the power button
Answer/end call	Short press the power button
Refuse to answer	When a call comes in, press and hold the power button for 2 seconds
Clear pairing information	Wireless: When the device is powered on and not connected, press and hold the "+" and "-" keys for 10 seconds and then turn off the device (clear all pairing and connection information) 2.4G: When the device is powered on and not connected, press and hold the "+" and "-" keys for 10 seconds to clear the dongle + phone.
Dongle/Wireless Mode	Long press the microphone button (Wireless—blue light is always on 2.4G—green light is always on)
MIC on/off	Click the microphone button during a call
Activate Voice Assistant	When the headset is working, press the power button three times.

Get Started

EN

Use device to connect Wireless

1. When the headset is powered, press the power button for 3 seconds to emit a "power on" prompt tone, and then the power indicator blue light flashes, and the headset enters the Wireless search pairing state.
2. At this time, please find the headset Wireless name "GT839" in the device Wireless list, click to connect, and the headset will prompt a "connected" prompt tone after the connection is successful.
3. The headset can remember the previously paired devices. When making a second connection, you only need to turn on the Wireless in the device, and the headset enters the power-on state, and it will automatically reconnect to the device (if it does not reconnect, please find the Wireless name in the Wireless list and click to connect).
4. If you want to change the paired device in the connected state, you can force the headset to enter pairing mode. Wireless: (power on and not connected, press and hold the "+" and "-" keys for 10 seconds at the same time and then turn off (clear all pairing and connection information)
5. 2.4G: power on and not connected, press and hold the "+" and "-" keys for 10 seconds at the same time to clear dongle + mobile phone.



Enter Wireless search and pairing mode, the blue light flashes, and the blue light stays on when pairing is successful. Enter 2.4G search and pairing mode, the green light flashes, and the green light stays on when pairing is successful.



“Information to User”

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

Important: Change or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

合格证

检测员____Q8____

