



ONIKUMA
GAMING


GT886



**PROFESSIONAL GAMING HEADSET
USER MANUAL**

Line Mode

Insert the audio cable into the Line mode for direct operation. If the headphones are in wireless mode, inserting the cable will automatically turn off the wireless function and switch to Line mode.

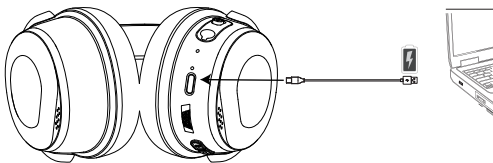

1. Toggle key/Bluetooth/2.4G
2. Light key / Microphone on/off
3. Power Button (MPI)
Previous Track / Next Track
4. Volume Potentiometer
5. Bluetooth Indicator /
2.4G Indicator / Power Indicator
6. Charging Port Type-C /
Audio Line Interface
7. Microphone

Product Parameters

Wireless Version	V5.4
Transmission Distance	15m
Speaker Impedance	$32\Omega \pm 15\%$
Sensitivity	105 $\pm$ 3dB
Frequency Response	20Hz-20KHz
Battery Capacity	1000mAh
Playback Time	$\approx$ 60 hours
Charging Time	$\approx$ 2.5hours
Rated Input	5V / 600mA

Function Controls

Power On	Press and hold the power button for 3S
Power Off	Press and hold the power button for 5S in any state
Volume +/-	Turn the scroll wheel to adjust volume
Previous Track	Triple-click the Power Button
Next Track	Double-click the Power Button
Play/Pause	Short press the power button
Answer/End Call	Short press the power button
Reject Call	Hold power button for 2 second
Clear Pairing Information	Bluetooth: In powered-on state, click the power button five times to clear pairing information, then power off. 2.4G: In powered-on state, click the light button five times until the green light flashes quickly, then insert the Dongle to re-pair.
Dongle/Wireless Mode	Press the switch key (BT – blue light steady on; 2.4G – green light steady on)
MIGF On/Off	Click the light button
Light On/Off	Press and hold the light button for 2 seconds
Activate Voice Assistant	Double-click the light button



How to use

EN

Connecting with a Device

1. While the earphone has power, press the power button for 3 seconds. You will hear the “power on” prompt, and the power indicator blue light will flash, indicating the earphone is in pairing search mode.
2. Find the earphone’s wireless name “GT886” in your device list and click to connect. Once connected, the earphone will play the “connected” prompt.
3. The earphone can remember previously paired devices. For reconnection, simply turn on your device while the earphone is powered on, and it will automatically reconnect (if it does not reconnect, find the product’s pairing name in your device list and click to connect).
4. To switch to another paired device while already connected, you can force the earphone into pairing mode:
In powered-on state (connected or not), click the power button five times to clear pairing, then power off.

The earphone will enter pairing search mode with blue light flashing. Once paired, the blue light stays steady. For 2.4G pairing search mode, the green light flashes. Once paired, the green light stays steady.

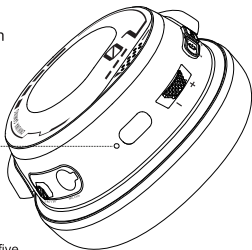

2.4G: In powered-on state, click the light button five times until the green light flashes quickly, then insert the Dongle to re-pair.

“Information to User”

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

Important: Change or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.