


STATEMENT	01
SAFETY INSTRUCTION	01
REINFORCE LEARNING BEHAVIOURS	01
Tips	02
BEFORE USING THE DOG TRAINING COLLAR	02
WHEN USING THE DOG TRAINING COLLAR	02
PACKAGE CONTENTS	03
MAINTENANCE	03
SPECIFICATIONS	04
INTRODUCTION FOR THE BUTTONS	04
OPERATION AND CHARGING	05
How to Choose USB Charger	05
Charge the Remote Transmitter	06
Charge the Receiver	06
To Turn the Receiver On and Off	06
Check the Receiver Power	06
HOW TO WEAR RECEIVER COLLAR CORRECTLY	06
PAIRING AND TESTING	07
REFERENCE SIZE FOR DIFFERENT DOGS	08
FAQ	08
WARRANTY	11

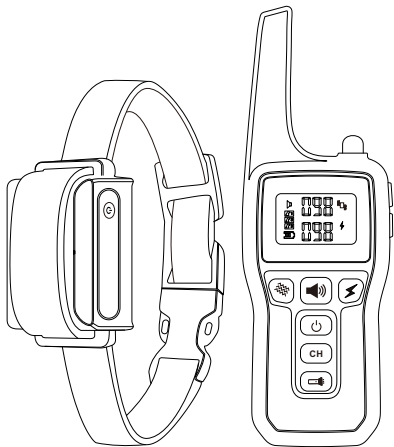

PD 529

DOG TRAINING COLLAR

User Guide

STATEMENT

Thank you for purchasing the remote dog training collar PD 529, this product has been tested to meet your stringent quality standards, and also covered with warranty for 12 months from the date of its original purchase.

Please contact us with your order ID and problem or issue, we will respond within 24 hours.

This warranty is void if the defect is caused by accidental damage, misuse, abuse, neglect, improper repair or alteration by unauthorized persons, or a failure to follow operating instructions provided with the product including adding essential oils directly into the tank and base.

This warranty does not apply to normal wear and tear or commercial use. In no event shall liability exceed the purchase price paid by the purchaser of the product. under no circumstances shall there be liability for any loss-direct, indirect or incidental-or consequential damage arising out of, or in connection with the use of the product.

SAFETY INSTRUCTION

Training collars are used to train the dogs and not for punishment. Use properly with care and the collar can be a safe and effective tool to train. Building communication and strengthen your bond with your best friend. Obey all safety messages that follow this instruction to avoid possible injury.

If your dog has heart disease, high blood pressure, cerebral thrombosis, skin allergies, etc., please do not use it.

REINFORCE LEARNING BEHAVIOURS

If your dog knows the command but responds inconsistently than your requirement, a training collar can sharpen his skill.

For example, you have taught your dog to come when calling, but over time he responds slower. You can communicate with him via the remote transmitter, so that he immediately responds to your call.



1. Set the collar to initial stimulation level and test it.
2. Fit the collar on your dog's neck along with his regular collar.
3. Let him roam around the training area. Then give the command and simultaneously press the stimulation button.
4. The instant your dog moves toward you, stop stimulation and praise him.

5. If he stops before he reaches you or turns away, repeat the command and continue the stimulation. Again, stop at the instant he runs to you and rewards him by praising him or feeding him a treat. Repeat this for 3 or 4 times.

Tips

1. If he doesn't get it for the first few times, don't give up and do not increase the stimulation. Try to work on this a few times.
 2. During the training period never give the command if you are not able to enforce it. Your dog has to make the mental connection between the static shock/vibration/beep to his behavior (may take a week or more for some dogs).
- Altogether, both methods of stopping unwanted behavior and reinforcing learning behaviors can be applied to nearly every training scenario.

BEFORE USING THE DOG TRAINING COLLAR



1. Do not expose to extreme heat or store at the temperatures above 113°F or 45°C.
2. Please always keep the dog training collar out of reach of children.
3. Charge the remote transmitter and receiver at least 2 hours when receive the item. The collar can't receive any signals while it is being charged.

WHEN USING THE DOG TRAINING COLLAR



1. Avoid leaving the collar on dog for more than 18 hours per day.
2. If possible, please reposition the collar on the dog's neck every 1 to 2 hours.

3. Check the fit to prevent excessive pressure.
4. The charging rubber cap must be closely covered when your dog swimming or the receiver will get broken when getting into water from the interface. Taking off the receiver is recommended.
5. The receiver will turn off automatically after 10 seconds "beep" sound when battery is low.

PACKAGE CONTENTS

PD 529-1 (For 1 dog)

- 1 x Remote Transmitter

1 x Receiver

1 x Collar Strap

1 x USB Charging Cable

2 x Long Conductive Silicone Caps

2 x Short Conductive Silicone Caps
- 1 x Lanyard

2 x Long Contact Points

2 x Short Contact Points

2 x Anti-Shock Pads

1 x Test Lamp

1 x User Manual

PD 529-2 (For 2 dogs)

- 1 x Remote Transmitter

2 x Receiver

2 x Collar Strap

1 x USB Charging Cable

4 x Long Conductive Silicone Caps

4 x Short Conductive Silicone Caps
- 1 x Lanyard

4 x Long Contact Points

4 x Short Contact Points

4 x Anti-Shock Pads

1 x Test Lamp

1 x User Manual

PD 529-3 (For 3 dogs)

- 1 x Remote Transmitter

3 x Receiver

3 x Collar Strap

1 x USB Charging Cable

6 x Long Conductive Silicone Caps

6 x Short Conductive Silicone Caps
- 1 x Lanyard

6 x Long Contact Points

6 x Short Contact Points

6 x Anti-Shock Pads

1 x Test Lamp

1 x User Manual

MAINTENANCE

1. Please examine regularly to ensure tightness of the remote transmitter and eliminate any external damages.

2. Clean the screw caps with alcohol weekly.

3. Examine your dog's neck and carry out weekly cleanup.

4. The battery is rechargeable. In order to maintain battery life, please charge it every 2 months if it is not often used.

03

PD 529-2: For 2 dogs, 2 receivers, you can choose the same signal channel for the 2 receivers, or you can choose 2 signal channels, please remember the signal channel of each receiver;

PD 529-3: For 3 dogs, 3 receivers, you can choose the same signal channel for the 3 receivers, or you can choose 3 signal channels, please remember the signal channel of each receiver;

- 2 Power Button/Lock of Remote: Press to turn the remote transmitter on and off.

3 Static Shock Button: Press the static shock button and the receiver will emit static shock signal.

4 Vibration Button: Press the vibration button and the receiver will emit vibration signal.

5 Tone Button: Press the tone button and the receiver will beep .The tone function is not adjustable.

6 LED Light Button

7 LED Light

8 The +/- button: Reduce and raise the vibration and static shock level.




9 Charging Port of Remote Transmitter.

10 Power Button of Receiver

11 Indicator Light of Receiver

12 Contact Points: Choose a suitable length to fit for different thickness of dog hair.

OPERATION AND CHARGING



How to Choose USB Charger


Please choose the USB charger with the parameters below (we can charge the device by the charger of smart phone or laptop/computer USB interface, before that please check if the charger is with the following parameters):

05

SPECIFICATIONS

Model	PD 529-TIO
Function	Training Dogs
Working Modes	Tone,Vibration,Static Shock
Static Shock/Vibration Levels	1-100 Levels
Net Weight	Remote Transmitter: 50g Receiver: 45g
Channels	3 Channels
Remote Range	1000m /1100yds/3300ft
Battery Capacity	Remote Transmitter: 300mAh Receiver: 650mAh
Working Time	Remote Transmitter: 180 days Receiver: 25-40 days
Waterproof Level	Remote Transmitter:IPX3 Receiver: IPX7

INTRODUCTION FOR THE BUTTONS

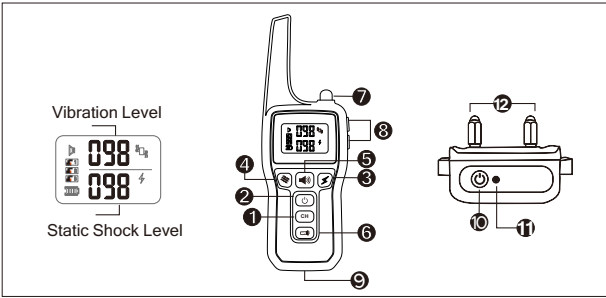

- 1 Signal Channel Button: Press this button, choose channel 1, 2 or 3 as the signal channel of dog training before connecting the signals between remote transmitter and receiver.

Note:

PD 529-1: For 1 dog only, 1 receiver, can choose any channel as your dog training signal, otherwise you have to connect the signals again when training your dog;

04

Input: 100-240v ~ 50-60HZ
Output: 5V 1000mA (or 300mA/500mA)

Charge the Remote Transmitter

1. Connect the charger cable to the charging port.

2. Plug the charger into a standard socket.

3. The battery icon will flash during charging and be solid when charging is completed.

Charge the Receiver

1. Open the rubber cover, connect the receiver to a charger into a standard socket.

2. The red indicator light will flash slowly when the receiver is charging. After fully charged, the red indicator light keeps on.

To Turn the Receiver On and Off

1. Turn on: Press the power button once, the receiver will make a short "beep" sound, means that the receiver is turned on.

2. Turn off: Press the power button once, the receiver will make a long "beep" sound and the indicator light is not flash any more.

Check the Receiver Power

When the receiver is turned on, press the power button twice quickly to check the power:

Receiver beeps 5 times, representing 100% (80-100%)


Receiver beeps 4 times, representing 80% (60-80%)

Receiver beeps 3 times, representing 60% (40-60%)

Receiver beeps 2 times, representing 40% (20-40%)

Receiver beep 1 time, representing 20% (1-20%)

HOW TO WEAR RECEIVER COLLAR CORRECTLY



Correct wearing position helps healthy and effective dog training.

1. Receiver shall be placed at botton of dog's neck, and the screw caps must contact the dog's skin directly.

2. If your dog has thick hair on the neck, please use longer screw caps.

06


3. The anti-shock pads could prevent skin abrasion. It's recommend to use 2-3 times a week.
4. The space between receiver collar and the dog's neck shall be maintained to a finger distance, which can't be too loose, otherwise static shock effectiveness shall be badly influenced.
5. The extra part of the strap can be trimmed, or be handled with other methods.

PAIRING AND TESTING

How to Pair the Remote Transmitter and Receiver

1. Open the remote transmitter, press the **(C)** button to choose a signal channel you want to use.
2. Hold power button on the receiver for 2 seconds, when the indicator light keeps flashing, Press one of the function button like tone, vibration or static shock on remote to pair.
3. If you do not press the function button within 10 seconds, please pair them again.
4. If you have multiple receivers, you can choose the same signal channel or choose another channel for pairing.

Test the Dog Training Collar



1. Static Shock Function Test

Static shock function can not be seen with the naked eye, please use our test lamp. Press the static shock function button, the test lamp will shine.

2. Vibration Function Test

Press the vibration function button, the receiver will shake.

3. Tone Function Test

Press the tone button, the receiver will make a beep sound.

1. You need to pair remote transmitter and receiver before using it on dog. Please follow the manual for the first time use.
2. Please keep in mind the dog channel you choose and do not change to other one, or the receiver will not receive signals.
3. When the remote transmitter is turned off, all the functions are locked except for the LED light.

07

REFERENCE SIZE FOR DIFFERENT DOGS

Reference weight for dogs

Large Dog (Body height above 24 inch, Weight above 88 lbs)

Medium Dog (Height 16-24 inch, Weight 24.2-66 lbs)

Small Dog (Height 10-16 inch, Weight 8.8-22 lbs)

Mini Dog (Height under 10 inch, Weight under 8.8 lbs)

Size (Dog)	Neck (In)	Chest Measurement (In)	Back Length (In)	Type
Mini	7.8-8.6	9.8-11.8	17.5	Chihuahua, Yorkshire Terrier
Small	7.8-9.5	11.4-14.2	9	Chihuahua, Yorkshire Terrier, Poodle, Pomeranian
Medium	9.0-11.0	13.7-16.5	11	Maltese Dog, Shih Tzu
Large	9.6-12.2	16.2-18.5	12.2	Miniature Schnauzer, Pekingese
Large	11.8-13.4	18.1-20.8	13.8	Schnauzer, English Cocker Spaniel
Large	13.0-14.5	20.5-23.2	15.7	Beagle
Huge	17.0-18.9	30.0-33.0	23.6	Husky

FAQ

Q: How old my dog can use Dog Training Collar?


A: DO NOT use on puppies younger than 6 months.

Q: Can I use Dog Training Collar with more than one dog?

A: Yes, you can simply add one or two receiver collars to the system to control two or three dogs, because three dog channels are available with one remote transmitter.

Q: What's the function of anti-shock pads?

A: Anti-shock pads could prevent skin abrasion, avoid hurting dog's skin when you do not need to use static shock function, and also it could be insulated from electricity.



08

Q: What should I do if my dog's neck becomes red and irritated?

A: Discontinue to use the dog training collar for a few days. If the condition persists beyond 48 hours, please ask your veterinarian to check. Continue to monitor your dog's skin condition closely even if the skin becomes normal.

Q: Can I attach a leash to the receiver collar?

A: NO. This will result in pulling the screw caps (contact points) too tightly against your dog's neck. Use a separate collar placed above the Receiver Collar.

Q: How do I know when to charge the batteries of the Dog Training Collar?

A: For Remote Transmitter: The battery level icon will be displayed on the left down side of LCD screen. For Receiver: press the power button twice quickly to check the battery level, if only one beep is emitted, charge it in time.

Q: How long can I leave Receiver Collar on my dog?

A: The Receiver Collar is not designed to be worn constantly. We recommend to wear the Collar on your dog less than 18 hours out of every 24-hour period.

Q: How long should I process my training session for my dog?

A: Training sessions should be kept positive and short, it is better for about 10-15 minutes long each time.

Q: What are the proper levels of Vibration and Static Shock for my dog?

A: Try to find the best suitable levels of Vibration and Static Shock for your dog starting from the lowest level. Excessive levels of stimulation shall cause strong response from your dog.

Q: What is the effective distance of your Dog Training Collar?

A: Without obstacles, the effective distance could be as far as 1000 meters between Remote Transmitter and Receiver Collar. However in reality, a list of factors, including signal station, magnetic field, obstacle, battery volume, other wireless devices nearby, landform, vegetative cover, etc, shall influence transmission of signals from Remote Transmitter and the actual effective distance of Remote Transmitter.

Q: Any other better training methods?

A: You can prepare some dog food for training incentive to achieve better training outcomes.

09

Each time after you restrain your dog's misbehavior, you can tell your dog what is supposed to do and what is not.

And after a few times of repetitions, your dog will understand what you like and what you don't like.

Q: I want to test Static Shock function of Receiver Collar myself, but it does not work, is anything wrong?

A: If you test Receiver Collar by your hand or leg, please touch the 2 screw caps (electrodes) at the same time, touching only one screw cap (electrodes) will not work.

Q: Once my dog is trained and has obeyed to my commands, is it still necessary for my dog to continue wearing the receiver collar?

A: Yes, you may need to reinforce your dog's memory with the receiver collar from time to time.

Q: The dog training collar does not work, or my dog does not respond after correct installation of the dog training collar, how should I solve this problem?

A: 1. Make sure both Remote Transmitter and Receiver Collar have enough power battery to operate.

2. Check to see if Receiver Collar is turned on.

3. Check signal channel button on Remote Transmitter to ensure Signal Channels are correctly configured.

4. Try to pair the remote transmitter and receiver again.

5. Take off Receiver Collar and test all of the three functions work properly.

6. Make sure Receiver Collar is properly worn and the receiver collar is not loose.

7. Trim your dog's hair where the screw caps (contact points) can touch the neck.

40

WARRANTY

This product is covered with warranty for 12 months from the date of its original purchase.

Any defective part will be repaired or replaced at no charge if the appliance has not been tampered with and has been used according to these printed directions.

If any problems occur, please contact the local dealer immediately to launch a warranty claim. Our consumer service representative will respond within 1 business day, advise you how to correct the problem yourself or instruct you on how to return the defective unit back to us for repair or replacement.

Manufacturer: Flying Shuttle International Trading Co., Ltd.

Address: ROOM 1201, 12/F, TAI SANG BANK BUILDING, 130-132 DES VOEUX ROAD, CENTRAL, HONG KONG

Representative in the EU

Name: Enbaoixin Germany Maternal and Infant Supplies GmBH

Address: Laubenhof 23, 45326 Essen

e-mail: jasvigor2020@hmail.com



Warnings and safety information

All information regarding the use of the product can be found in the user manual. Before using it, read its contents and follow the instructions contained therein.

Also read the following information before use:

Warnings regarding use

Risk of product damage:

- Only use the products for their intended purpose as described in the user manual.
- Regularly check the condition of leashes, collars, backpacks and other accessories. In the event of visible damage, such as abrasions, cracks or deformations, discontinue use of the product to avoid the risk of losing control of your pet.
- Do not overload products intended for transport, such as backpacks and bags - adhere to the maximum recommended weights and sizes for your pet.

Pet hazards:

- Leashes, collars and harnesses should be properly fitted to the size and weight of the animal. Incorrect fit can cause discomfort or injury.
- Transport products (e.g. backpacks) should only be used to carry animals of the correct weight and size.
- When walking in low visibility conditions, it is recommended to use accessories with reflective elements or LED lighting to increase the visibility of the animal and its handler.

Risk to children:

- Products designed for animals, such as leashes or collars, are not toys. Do not allow children to use these products without adult supervision.
- During walks, children should be instructed on how to safely lead the animal on a leash to avoid unexpected situations such as the animal breaking out.

Risks associated with electronic components:

- Regularly check the condition of the batteries and replace with new ones in accordance with the manufacturer's recommendations if they are exhausted.
- Avoid contact of electronic products with water if they are not labelled as waterproof.

Information on correct use

Recommendations for use:

- Always choose a product suitable for the size and weight of your pet (e.g. leash, collar or carrier backpack).
- Read the instruction manual before first use. Make sure that all components, such as fasteners, snap hooks and buckles, work correctly.
- When walking in public areas, make sure the leash is properly secured to prevent accidental release of your pet.

Maintenance and storage:

- Store products in a dry and clean place, free from moisture and extreme temperatures.
- Clean the walking and transport accessories regularly with a soft cloth and mild detergents. Do not use chemicals or sharp tools.
- For LED accessories, replace the batteries according to the instruction manual to ensure uninterrupted lighting.

Battery safety:

- Use only batteries recommended by the manufacturer.
- Dispose of used batteries according to local environmental regulations.
- Do not store batteries in the product for long periods of time when not in use to avoid leakage.

Additional precautions

Adjustment to your pet:

- Regularly check that the collar, leash or backpack is comfortable and fits your pet correctly. An improper fit can cause abrasions or other injuries.
- Observe your pet's reaction to new products - if you notice signs of discomfort, discontinue use.

Damage and service:

- Any repairs to mechanisms or electronic components should only be carried out by authorised service centres.
- Do not modify the product yourself as this may affect the safety of use.

Declaration of conformity

The products have been designed in accordance with the safety requirements of Regulation (EU) 2023/988 and comply with the relevant technical standards, including safety of materials and moving mechanisms.